
THIS DOCUMENT IS THE PROPERTY OF OWNER, REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

C) 2010.


ASSEMBLY PROCEDURE: AP023I

- 1. Slide the crimp sleeve onto the cable.
- 2. Strip the cable to the dimensions given on the connectors datasheet. If the cable has a foil screen please check the datasheet for the stripping length of this screen.
- Slide the centre contact onto the cable conductor up to cable dielectric. If the conductor is of stranded construction, ensure all the strands have entered the contact.
- 4. Ensure that the conductor is visible through the contact's inspection hole.
- 5. Carefully place Cable and Centre
 Contact assembly into the crimp tool.
 The first groove after the ramp at the
 front of the contact should be placed
 into the slot in the Contact Stop Plate.
 Push the Centre Contact forward until
 the flange of the Centre Contact butts
 up against the plate as shown. Crimp
 the centre contact. Remove and
 carefully check the crimp joint.
- 6. Fan the cable braid out. On foil screened cables the foil must remain around the cables dielectric, and pass inside the connectors rear bore. It must never be placed over the knurled area, as the tapes often used in the construction of this screen could insulate all the screens from the connector.
- Slide the cable into the connector and push home until the centre contact locates into place in the connector. Ensure all the braid strands pass outside over the knurled area of the connector.

Α4	SHEET 1 OF 2		DIMENSIONS ARE IN MILLIMETERS			
REVISION: AOO		ROHS 2002/95/EC	NAME	SIGNATURE	DATE	
		DRAWN	GE		03/06/2013	
ISSUE	: 1	CHK'D	G		03/06/2013	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D				
		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUTPRIOR NOTICE.				

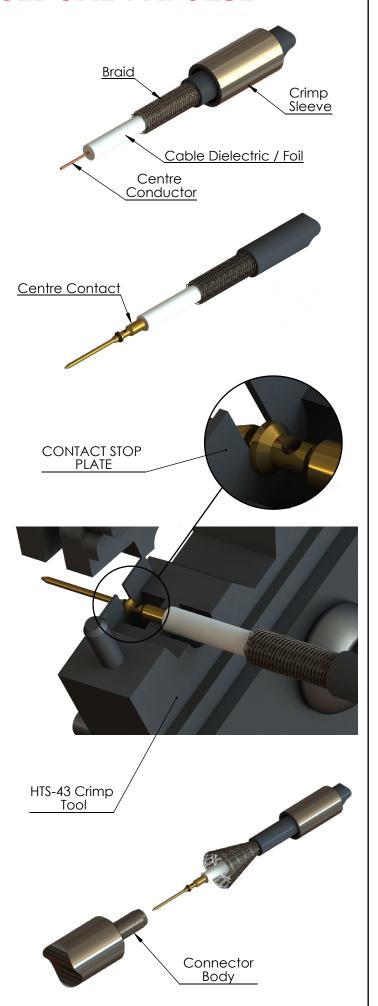

- 9. Slide the crimp sleeve forward over the braid and knurled area of the connector to the rear of the connector body.
- 10. Crimp the crimp sleeve using the appropriate sized crimp tool given on the connectors datasheet (trim excess braid if necessary)

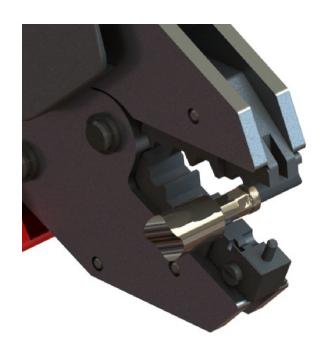

11. Carefully check the assembly.



Α4	SHEET 2 OF 2	/	DIMENSIONS ARE IN MILLIMETERS				
REVISI	on: A00	ROHS 2002/95/EC	NAME	SIGNATURE	DATE		
		DRAWN	GE		03/06/2013		
ISSUE	: 1	CHK'D	IG		03/06/2013		
6-8	COLNE ROAD,	APPV'D					
TWICKENHAM, MIDDLESEX. TW1 4JR		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUTPRIOR NOTICE.					

2010. THIS DOCUMENT IS THE PROPERTY OF OWNER. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD. PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT