

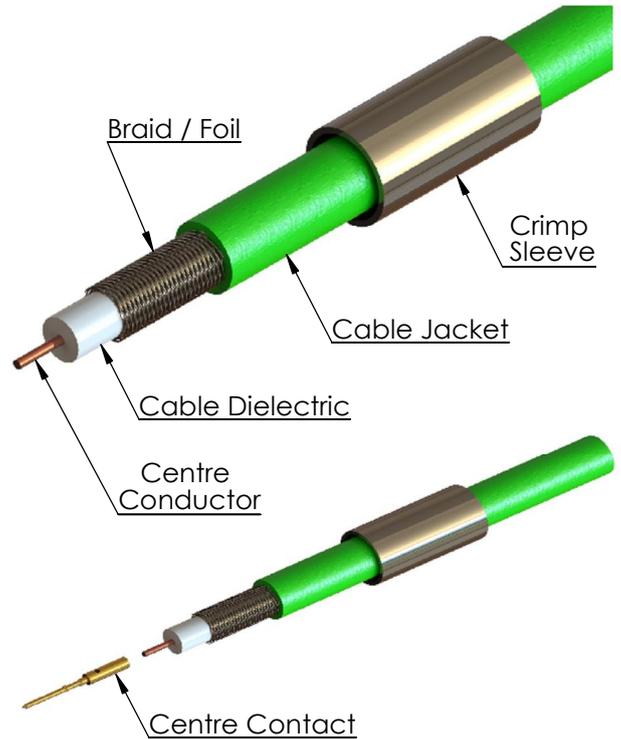


ASSEMBLY PROCEDURE : AP026

1. Slide the crimp sleeve onto the cable.
2. Strip the cable to the dimensions given on the connectors datasheet. If the cable has a foil screen please check the datasheet for the stripping length of this screen.
3. Slide the centre contact onto the cable centre conductor up to cable dielectric. If the conductor is of stranded construction, ensure all the strands have entered the contact.
4. Ensure that the conductor is visible through the contact's inspection hole.

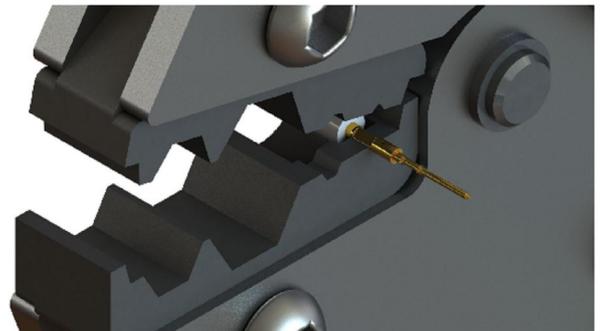

5. Carefully place cable and centre contact assembly into the appropriate crimp tool, details of which are given on the connectors datasheet. Make sure the area to be crimped, between the rear of the centre contact and the inspection hole, is centred in the tool as shown. There should be no gap between the rear of the contact and cable dielectric.
6. Crimp the centre contact. Remove and carefully check the crimp joint.

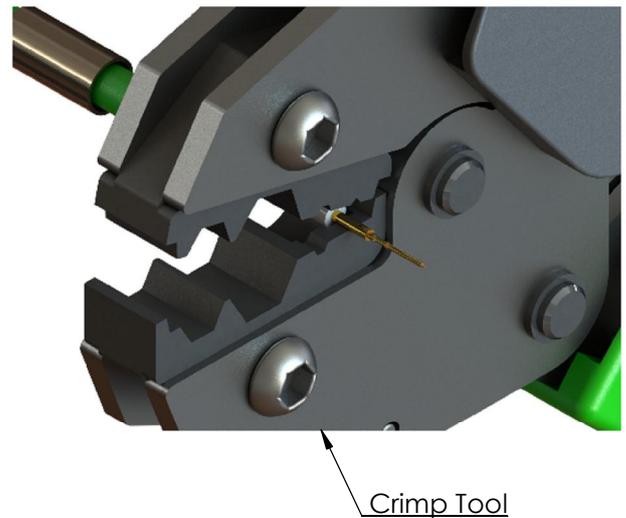


© 2010. THIS DOCUMENT IS THE PROPERTY OF OWNER. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

A4	SHEET 1 OF 2		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE	
ISSUE :	1	DRAWN	GE		20/01/2012
		CHK'D	PS		20/01/2012
		APPV'D			
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>					

ASSEMBLY PROCEDURE : AP026

7. Take the connector body and place the small diameter of the centre contact alignment tool fully into the front of the connector.

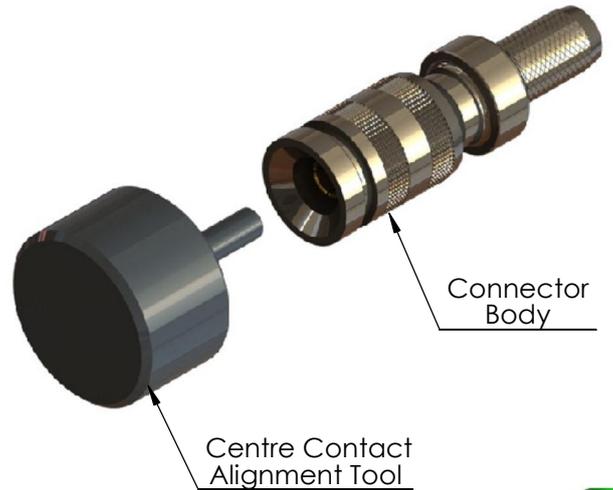


8. Fan the cable braid out. On foil screened cables the foil must remain around the cables dielectric, and pass inside the connectors rear bore. It must never be placed over the knurled area, as the tapes often used in the construction of this screen could insulate all the screens from the connector.



9. Slide the cable into the connector and push home until the centre contact "CLICKS" into place in the connectors dielectric. Ensure all the braid strands pass outside over the knurled area of the connector.

10. Slide the crimp sleeve forward over the braid and knurled area of the connector to the rear of the connector body.

11. Place the crimp sleeve and connector body assembly into the appropriate sized crimp tool given on the connectors datasheet.

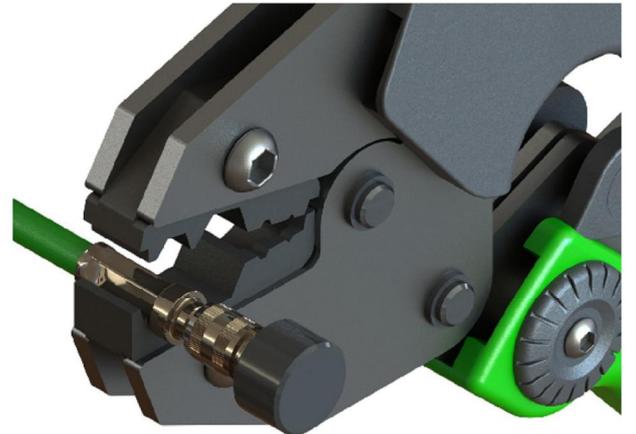

12. Crimp the crimp sleeve. Remove from tool and check the crimp (trim excess braid if necessary).

13. Remove the alignment tool from the connector body and retain for further use. Carefully check the whole assembly and ensure the centre contact is central.



© 2010. THIS DOCUMENT IS THE PROPERTY OF OWNER. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

A4	SHEET 2 OF 2		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE	
ISSUE :	1	DRAWN	GE		20/01/2012
		CHK'D	PS		20/01/2012
		APPV'D			
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>					