



BNC STRAIGHT CRIMP / CRIMP PLUG

10-005-A6-BB

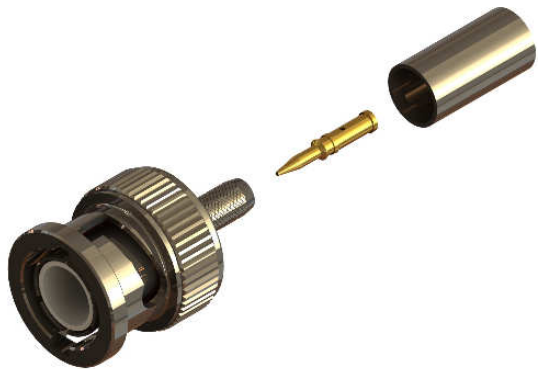


images for illustration purposes only

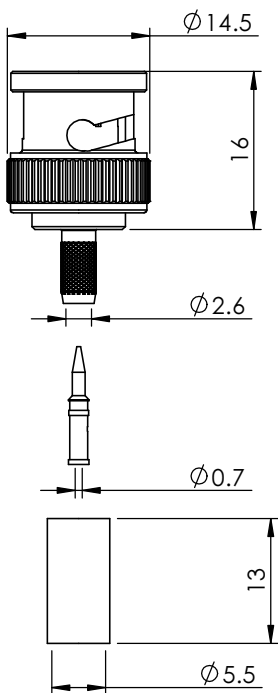

Suitable for Cables:

(BB) BT2002

Stripping Dimensions



a = 4.0mm mm
b = 8.0mm mm
c = 16.0mm mm
d = 12.0mm mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: HEX 1.46mm A/F Tool No: VQ Die Set

Crimp Sleeve: Hex 5.18mm A/F Tool No: VQ Die Set

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 1 GHz

Dielectric W/V: 1500 Veff

Insulation res: 500 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 220 N min

Mating cycles: 250

Weight: 9.84 g

Connector Interface

image for illustration purposes only



7	WASHERS	SK5	NICKEL
6	BAYONET CAP	ZINC	NICKEL
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	DELRIN	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	3	DRAWN	GE	22/08/2012
		CHK'D	IG	23/08/2012
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				