



BNC HIGH DEFINITION EASYGRIP CRIMP/CRIMP PLUG

10-005-EG-B126-FC

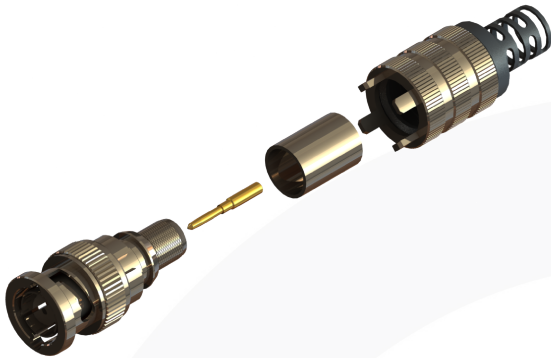


images for illustration purposes only

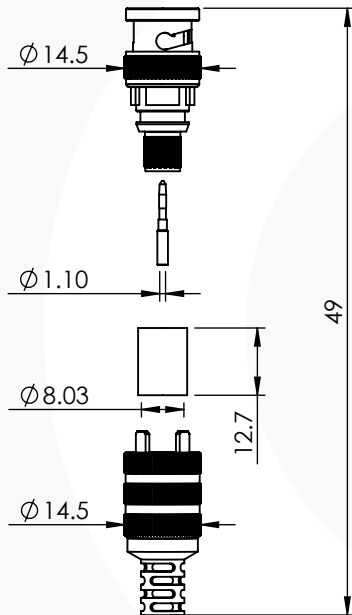

Suitable for Cables:

(FC) Belden 1694A, Belden 1694F, Draka 1.0/4.8 A/F, Bryant BD SD11, Image 1000, Condufil 13653, Percon VK7, VK77

Stripping Dimensions



- a = 4.0 mm
- b = 8.0 mm
- c = 18.0 mm
- d = 14.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

- Centre Contact: HEX 1.72 A/F Tool No: 96-HTS-75
- Crimp Sleeve: Hex 8.23mm A/F Tool No: 96-HTS-75
- Alignment Tool: N/A Extraction: 96-2208

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 64

Electrical Specification


Impedance: 75 Ohm
Frequency: 0 - 12 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: 100 N min
Mating cycles: 500
Weight: 21.43 g

Connector Interface

image for illustration purposes only



| 7 | WASHERS | SK5 | NICKEL |
|------|----------------|----------------|---------|
| 6 | REAR BODY | BRASS / ACETAL | NICKEL |
| 5 | GASKET | SILICONE | N/A |
| 4 | CRIMP SLEEVE | BRASS | NICKEL |
| 3 | INSULATOR | PTFE | N/A |
| 2 | CENTRE CONTACT | BRASS | GOLD |
| 1 | BODY | BRASS | NICKEL |
| ITEM | DESCRIPTION | MATERIAL | PLATING |

| | | | | |
|---|--------------|-------------------------------|-----------|------------|
| A4 | SHEET 1 OF 1 | DIMENSIONS ARE IN MILLIMETRES | | |
| REVISION : | C00 | NAME | SIGNATURE | DATE |
| ISSUE : | 1 | DRAWN | IG | 09/07/2015 |
| | | CHK'D | GE | 10/07/2015 |
| | | APP'V'D | | |
| 6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR | | | | |
| THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE. | | | | |