





DO NOT SCALE DRAWING

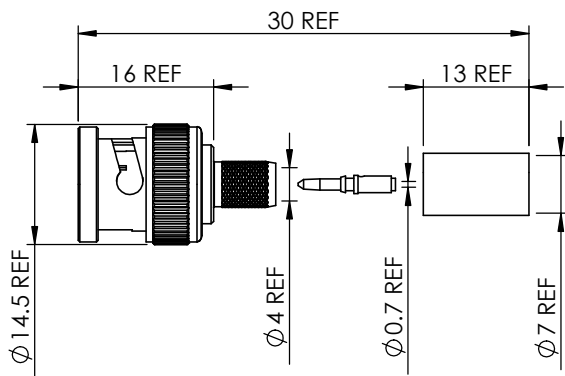

Assembly Procedure : AP001

The assembly procedure is given on its own separate instruction sheet. Please request the above AP number.

Stripping Dimensions



- a = 4.0 mm
- b = 8.0 mm
- c = 16.0 mm
- d = 12.0 mm

BNC STR. CR. PLUG PSF 1/3 (3 GHZ)

10-005-T36-BC

Suitable for Cables:

PSF 1/3

Electrical Specification

Impedance: 75 Ohm
 Frequency: 0 - 3 GHz (Cable Limited)
 Dielectric W/V: 1500 Veff
 Insulation res: 5000 M-Ohm

Mechanical Specification

Centre contact retention
 Axial Force: 10 N min
 Cable Retention: 220 N min
 Mating cycles: 500
 Weight: 9.83 g

Environmental Specification

Operating Temp: -55 to +155 Deg C.

Tooling

Centre Contact: Hex 1.72mm A/F
 Tool No: 336A
 Crimp Sleeve: Hex 6.50mm A/F
 Tool No: 336A

7	WASHERS	SK5	NICKEL
6	OUTER BODY	BRASS	BL. NICKEL
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4 SHEET 1 OF 1



DIMENSIONS ARE IN MILLIMETERS

REVISION :	B00	NAME	SIGNATURE	DATE
DRAWN	GE			19/03/2008
ISSUE :	1	CHK'D	IG	19/03/2008
		APPV'D		

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.