



BNC B/H CRIMP JACK FOR RG174

10-256-A0-AD

Suitable for Cables:

RG316, RG174, RG188, LMR100, WBC00, URM95, KX3, KX22

Electrical Specification

Impedance: 50 Ohm
 Frequency: 0 - 1 GHz (Cable Limited)
 Dielectric W/V: 1500 Veff
 Insulation res: 5000 M-Ohm

Mechanical Specification


Centre contact retention
 Axial Force: 27N N min
 Cable Retention: 60N N min
 Mating cycles: 500
 Weight: 4.42 g

Environmental Specification

Operating Temp: -30 to +70 Deg C.

Tooling


Centre Contact: Hex 1.72mm A/F
 Tool No: 336A
 Crimp Sleeve: Hex 5.41mm A/F
 Tool No: 336A

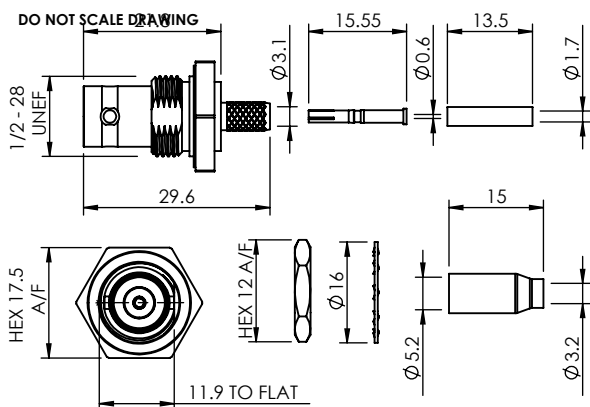

Assembly Procedure : AP001

The assembly procedure is given on its own separate instruction sheet. Please request the above AP number.

Stripping Dimensions



a = 3.0 mm
 b = 8.0 mm
 c = 16.0 mm
 d = 12.0 mm

9	CRIMP SLEEVE	BRASS	NICKEL
8	PUSHER SLEEVE	DELFIN	N/A
7	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
6	NUT	BRASS	NICKEL
5	WASHER	Fe	NICKEL
4	GASKET	SILICONE	N/A
3	BACK BODY	BRASS	NICKEL
2	INSULATOR	DELFIN	N/A
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETERS			
REVISION :	A00		NAME	SIGNATURE	DATE
DRAWN :	1		GE		22/06/2011
ISSUE :			CHK'D	WF	23/06/2011
			APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			