



BNC STRAIGHT INSULATED BULKHEAD CRIMP / CRIMP JACK 10-260-A3-AI

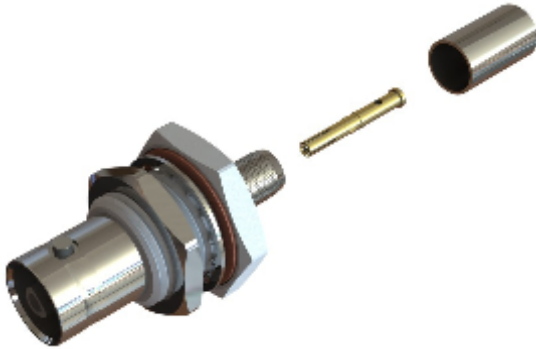


images for illustration purposes only

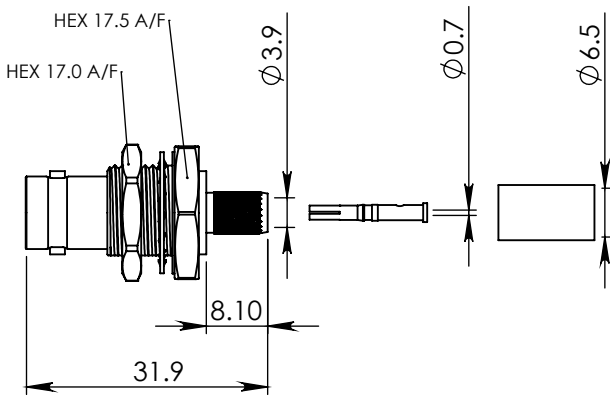

Suitable for Cables:

RG59, URM104, URM70, RG62, KX6, KX52, KX30

Stripping Dimensions



a = 4.0 mm
b = 8.0 mm
c = 16.0 mm
d = 12.0 mm

Assembly Procedure: AP001

Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336A

Crimp Sleeve: Hex 6.50mm A/F Tool No: 336A

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated):64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-1 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 150 N min

Mating cycles: 250

Weight: 22.34 g

Connector Interface

image for illustration purposes only



ITEM	DESCRIPTION	MATERIAL	PLATING
8	INSULATION	ABS	N/A
7	CRIMP SLEEVE	BRASS	NICKEL
6	CENTRE CONTACT	PHO. BRONZE	GOLD
5	BODY	BRASS	NICKEL
4	SPRING WASHER	Fe	NICKEL
3	NUT	BRASS	NICKEL
2	GASKET	SILICONE	N/A
1	INSULATOR	DELTRIN	N/A

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	12/01/2011
		CHK'D	GE	17/01/2011
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				