


BNC RIGHT ANGLED PCB JACK BULKHEAD MOUNT LOW PROFILE (6G)

10-416-B66



images for illustration purposes only

Recommended Mounting :

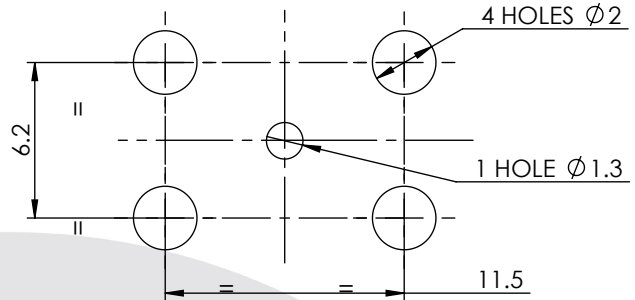

Max. Recommended Panel Thickness = 3mm

Recommended Panel Nut Torque = 250N.cm

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 22 N min

Cable Retention: Not Applicable



Mating cycles: 500

Weight: 22.30 g

Connector Interface

image for illustration purposes only

Panel Mounting :



Performance



-29.90 dB @ 1.5 GHz

-22.64 dB @ 3.0 GHz

-25.21 dB @ 4.5 GHz

-22.78 dB @ 6.0 GHz

Return Loss Graph

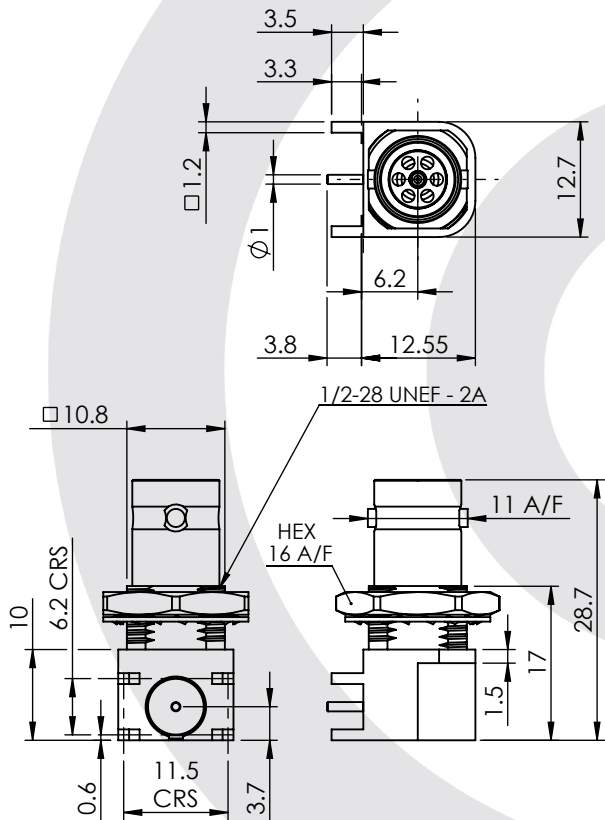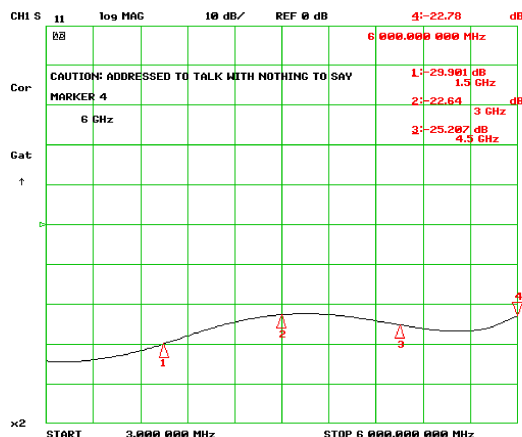

5	NUT	BRASS	NICKEL
4	WASHER	SK5	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODIES	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	GE	19/11/2013
		CHK'D	IG	19/11/2013
		APPV'D		
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR