



## BNC STRAIGHT B/HEAD PCB JACK WITH PANEL SEAL 10-455-B36




images for illustration purposes only

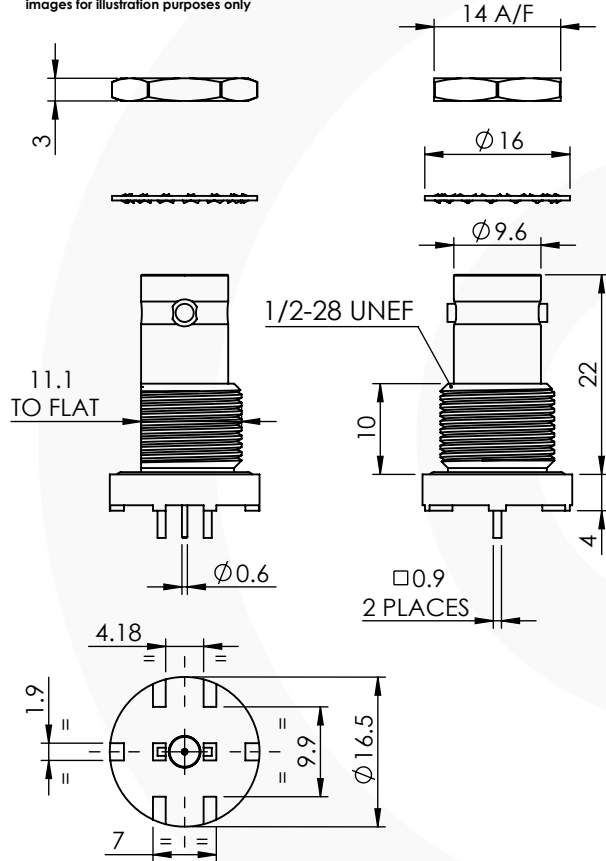

### Recommended PCB Layout :

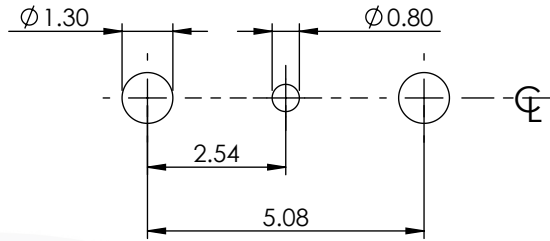

### Recommended Mounting Hole :

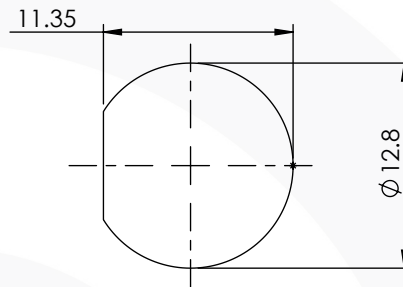

MAX PANEL THICKNESS: 6.3mm

### Environmental Specification

Operating Temp: -55 to +155 Deg C.  
IP Rating (Mated): IP 64

### Electrical Specification


Impedance: 75 Ohm  
Frequency: 0-6 GHz  
Dielectric W/V: 1500 Veff  
Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 27 N min  
Cable Retention: N/A  
Mating cycles: 500  
Weight: 16.31 g

### Connector Interface

image for illustration purposes only



5	WASHERS	SK5	NICKEL
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	GE	15/12/2015
		CHK'D	IG	15/12/2015
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				