



BNC END LAUNCH BULKHEAD JACK


10-462-D36-1.6

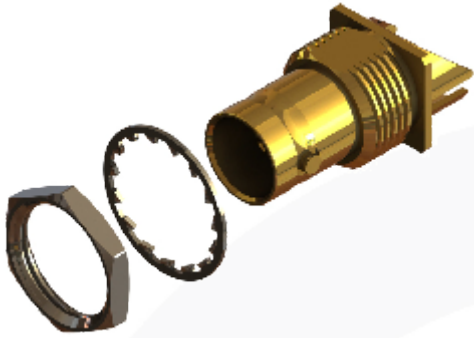


images for illustration purposes only

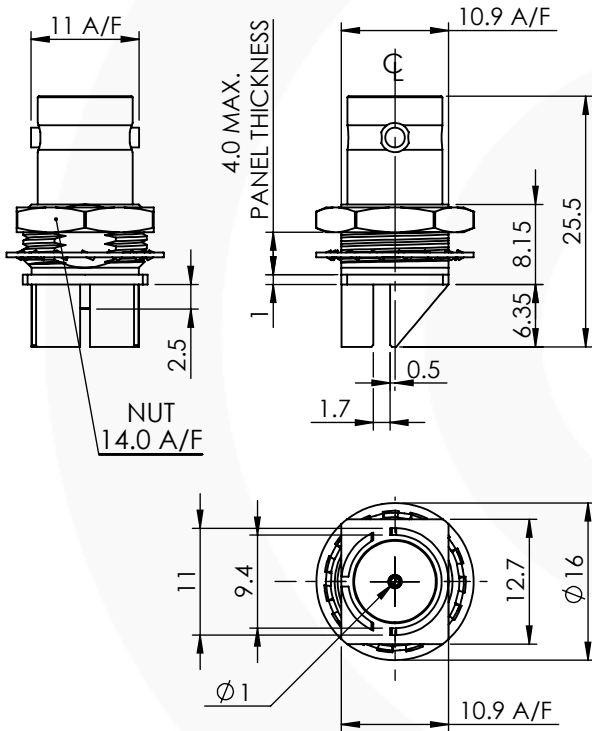

Recommended Mounting Hole

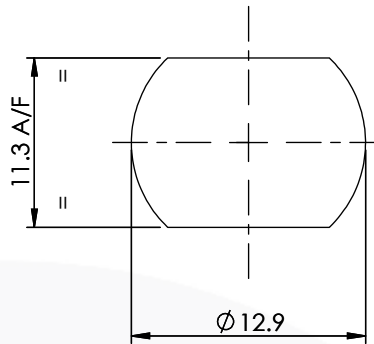

Recommended PCB Layout

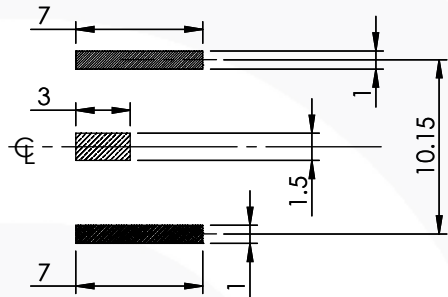

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 54

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-6 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min
Cable Retention: N/A N min
Mating cycles: 500
Weight: 12.33 g

Connector Interface


image for illustration purposes only



Performance

-34.95dB @ 1.0 GHz
-32.49dB @ 3.0 GHz
-28.34dB @ 4.5 GHz
-19.91dB @ 6.0 GHz

Return Loss Graph

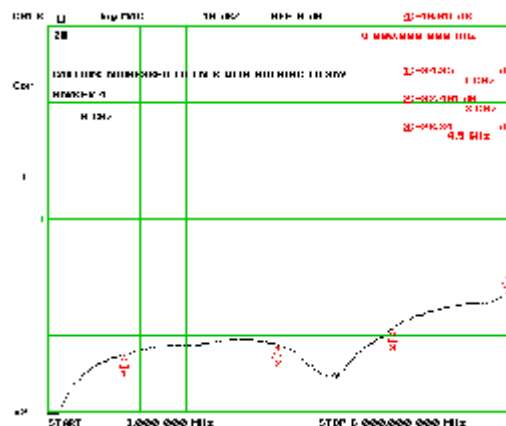

5	WASHER	SK5	NICKEL
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A02	NAME	SIGNATURE	DATE
ISSUE :	4	DRAWN	GE	09/12/2013
		CHK'D	IG	09/12/2013
		APP'V'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				