

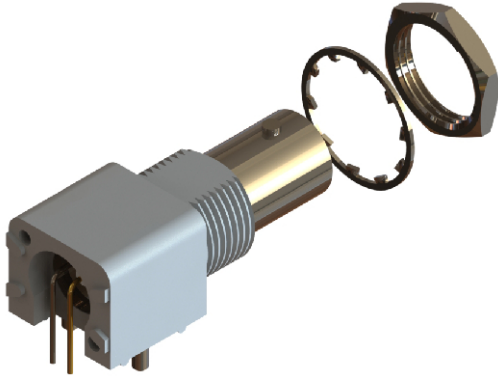



**BNC RIGHT ANGLE BULKHEAD PCB JACK, INSULATED, LOW PROFILE, WHITE 75 Ohm
10-471-K1**

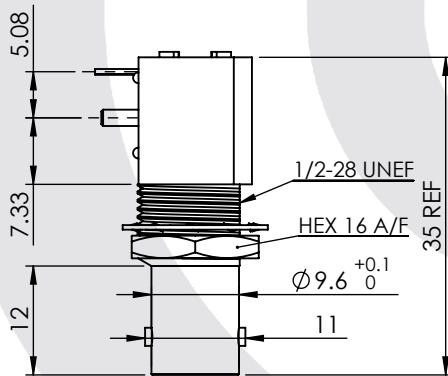

images for illustration purposes only

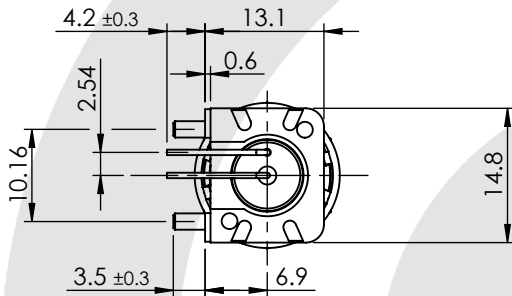

Recommended Mounting :

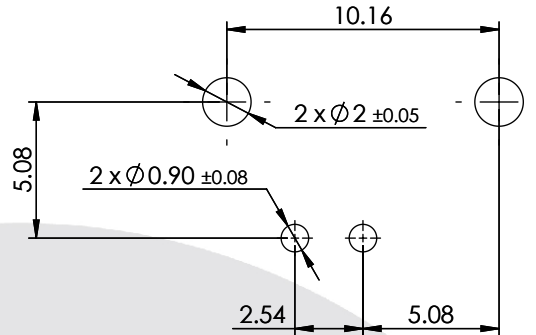

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): NONE

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-1 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification


Contact Retention: 10 N min
Cable Retention: Not Applicable
Mating cycles: 500
Weight: 5.33 g

Connector Interface

image for illustration purposes only



Panel Mounting



Max. Recommended Panel Thickness = 5.5mm

8	SOLDER TAILS	COPPER	TIN
7	MOUNTING POSTS	BRASS	TIN
6	HOUSING	WHITE PBT	N/A
5	NUT	BRASS	NICKEL
4	WASHER	STEEL	NICKEL
3	INSULATOR	PE-606	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	ZINC	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00		NAME	SIGNATURE	DATE
ISSUE :	2		DRAWN	GE	10/04/2014
			CHK'D	IG	10/04/2014
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D			<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>