

# **PRODUCT DATASHEET**


## **BNC VERTICAL PCB JACK** (3 Legs 75 ohm)

10-484-B36-13.7




images for illustration purposes only

2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD FARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

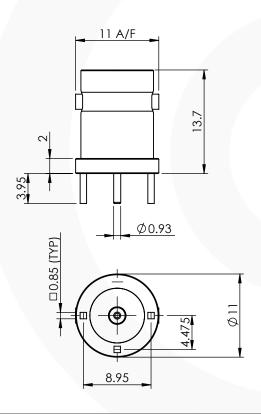

3	INSULATOR		PTFE		N/A	
2	CENTRE CONTACT		PHOSPHOR BRONZE		GOLD	
1	BODY		BRASS		NICKEL	
ITEM	DESCRIPTION		MATER	IAL	PLATING	
Α4	SHEET 1 OF 1	/	DIMENSIONS ARE IN MILLIMETRES			
REVISION: A00		ROHS 2002/95/EC	NAME	SIGNATURE I		DATE
		DRAWN	I IG			16/06/2014
ISSUE	: 1	CHK'D	GE			17/06/2014
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D				
		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS RECESSARY WITHOUT PRIOR				

#### **Recommended PCB Layout**



#### **Environmental Specification**

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

#### **Electrical Specification** Mechanical Specification


Impedance: 75 Ohm Frequency: 0 - 4.5 GHz

Dielectric W/V: 1500 Veff Insulation res: 5000 M-Ohm

Contact Retention: 10 N min Cable Retention: Not Applicable

Mating cycles: 500 Weight: 4.00 g

### **Connector Interface**



Tel: +44(0)20 8538 9090 Fax: +44(0)20 8538 9890 Email: info@coax-connectors.com