



## BNC PLUG TERMINATION 75 Ohm 10-862-A6

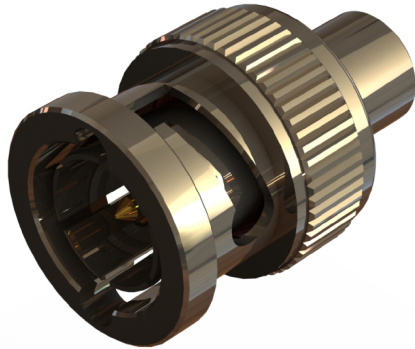

images for illustration purposes only

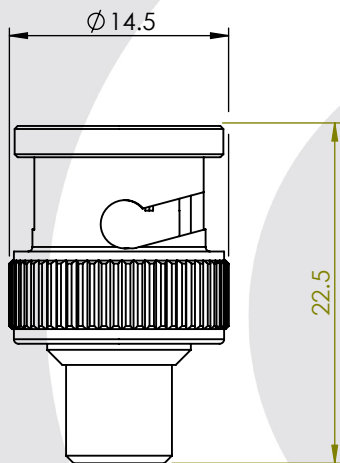

### Tooling

Alignment Tool: Not Applicable    Extraction: 96-2208

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 65

### Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 3 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min


Cable Retention: N/A

Mating cycles: 500

Weight: 9.73 g

### Connector Interface

image for illustration purposes only



### Performance


-57.0 dB @ 1.0 GHz

-31.76 dB @ 2.0 GHz

-33.3 dB @ 4.5 GHz

-18.1 dB @ 6.0 GHz

### Return Loss Graph

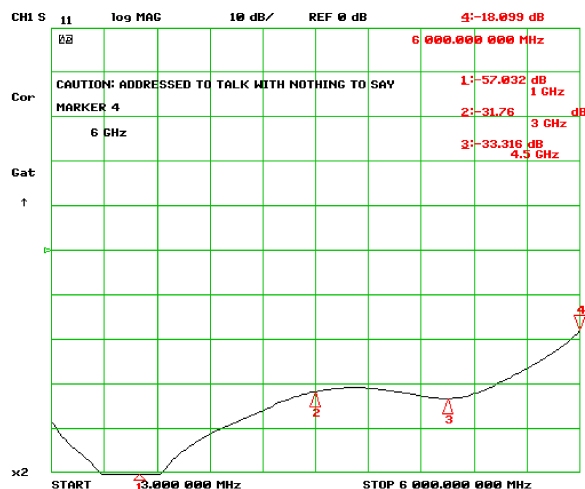

8	METAL FILM RESISTOR	N/A	N/A
7	WASHERS	SK5	NICKEL
6	COUPLING NUT	ZINC	NICKEL
5	GASKET	SILICONE	N/A
4	CAP	BRASS	NICKEL
3	INSULATOR	DELRIN	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	GE	22/04/2014
		CHK'D	IG	22/04/2014
		APP'V'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				