



BNC 75 OHM TERMINATION 10-863-W126

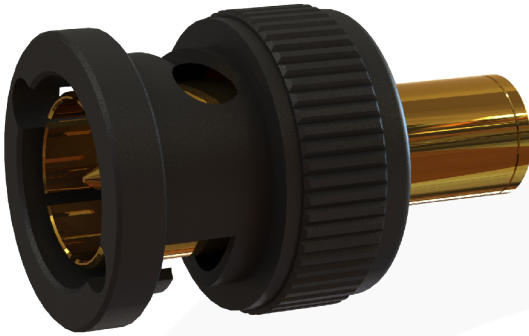

images for illustration purposes only

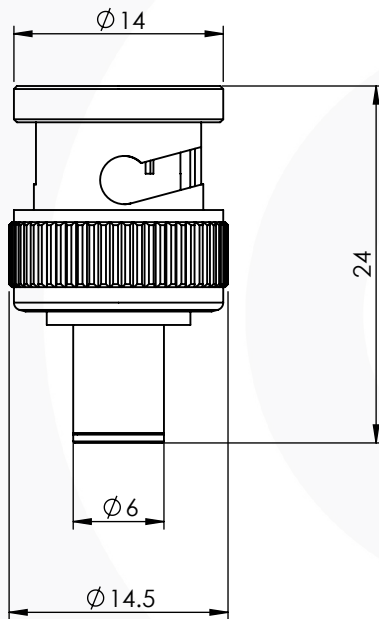

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 64

Electrical Specification


Impedance: 75 Ohm
Frequency: 0 - 12.0 GHz
Dielectric W/V: 1500 V eff min Veff
Insulation res: 500 M-Ohm min

Mechanical Specification

Contact Retention: 10N min
Cable Retention: NOT APPLICABLE
Mating cycles: 100
Weight: 9.23 g

Connector Interface


image for illustration purposes only



Performance

-24.50 dB @ 3.0 GHz
-15.58 dB @ 6.0 GHz
-11.16 dB @ 9.0 GHz
-9.57 dB @ 12.0GHz

Return Loss Graph

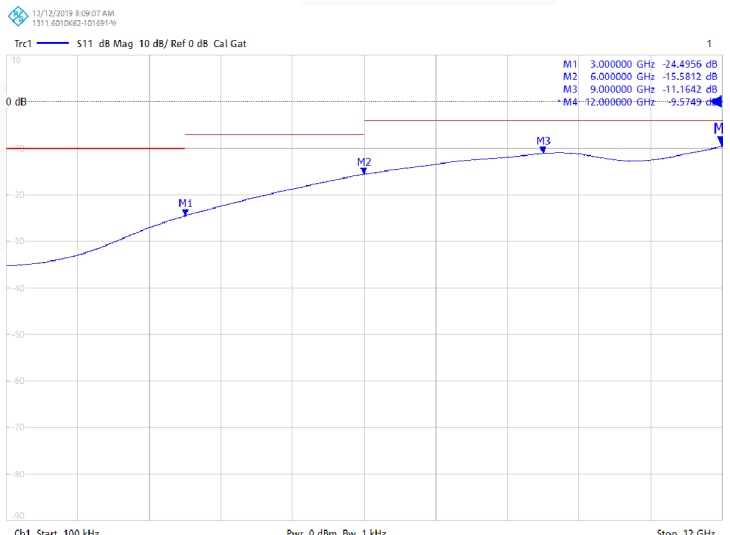

7	WASHERS	SK5	NICKEL
6	OUTER BODY	BRASS	BLACK NICKEL
5	GASKET	SILICONE	N/A
4	REAR BODY	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B02	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	IG	01/07/2016
		CHK'D	GE	02/07/2016
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				