



## F CRIMP PLUG 15-015-Z0-CA

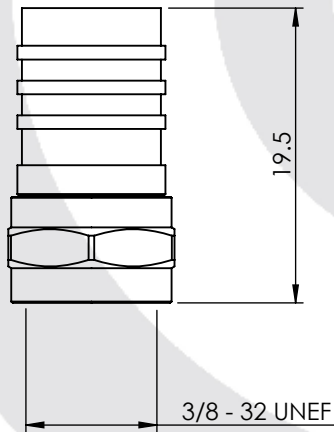


images for illustration purposes only



### Suitable for Cables:

(CA) CT100, RG6,WSC100

### Stripping Dimensions



a = 5.0 mm  
b = 10.0 mm  
c = 10.0 mm  
d = 5.0 mm

### Assembly Procedure: AP009

### Tooling

Centre Contact: Not Applicable      Tool No: Not Applicable

Crimp Sleeve: HEX 8.20mm A/F      Tool No: 96-106G

Alignment Tool: Not Applicable      Extraction: Not Applicable

### Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): NONE

### Electrical Specification      Mechanical Specification

Impedance: 75 Ohm

Contact Retention: Not Applicable

Frequency: 0 - 2 GHz

Cable Retention: 60 N min

Dielectric W/V: CABLE DEPENDENT


Mating cycles: 50

Insulation res: CABLE DEPENDENT

Weight: 4.94 g

### Connector Interface

image for illustration purposes only



3	BODY	BRASS	NICKEL
2	COUPLING NUT	BRASS	NICKEL
1	CRIMP BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	GE	24/01/2010
		CHK'D	DM	25/01/2010
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				