



## FME STRAIGHT CRIMP/CRIMP JACK 22-054-A3-AD

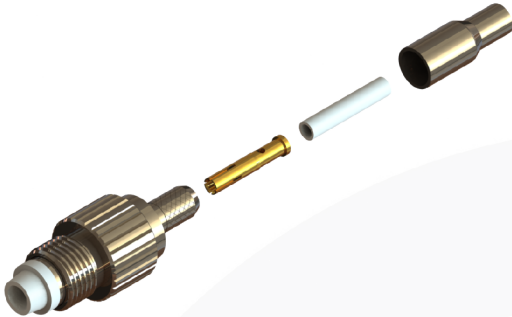

images for illustration purposes only

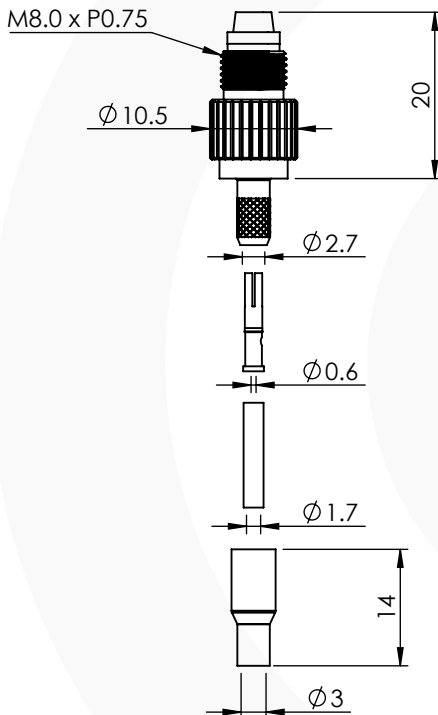


COUPLING NUT TORQUE : 0.9Nm

### Suitable for Cables:

(AD) RG316, RG174, RG188, LMR100, WBC100, URM95, KX3, KX22

### Stripping Dimensions



- a = 4.0 mm
- b = 8.0 mm
- c = 16.0 mm
- d = 12.0 mm

\* CUT FOIL TO DIM. "b"

### Assembly Procedure:

#### Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336J

Crimp Sleeve: Hex 4.52mm A/F Tool No: 336J

Alignment Tool: Not Applicable Extraction: Not Applicable

### Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 40

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-5 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 85 N min

Mating cycles: 500

Weight: 7.60 g

### Connector Interface

image for illustration purposes only



5	PUSHER SLEEVE	PTFE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	POM	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	02/06/2019
		CHK'D	P.P.	02/06/2019
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				