



N TYPE CRIMP / CLAMP PLUG

25-001-P3-AW

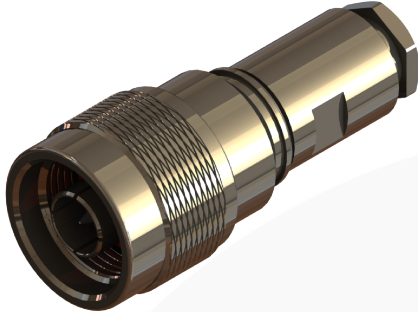


images for illustration purposes only

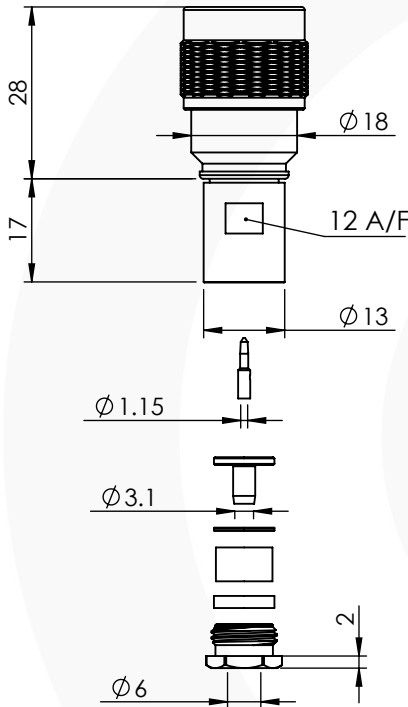

Suitable for Cables:

(AW) Aircell 5

Stripping Dimensions

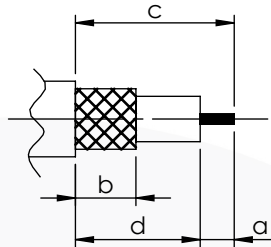

Assembly Procedure:

Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 96-HTS-75 or 336A

Crimp Sleeve: Not Applicable Tool No: Not Applicable

Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Unmated): IP 68

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-11 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 150 N min

Mating cycles: 500

Weight: 61.47 g

Connector Interface

image for illustration purposes only



8	BULLET CONTACT	BRASS	SILVER
7	NUT	BRASS	WHITE BRONZE
6	BODY	BRASS	WHITE BRONZE
5	GASKET	SILICONE	N/A
4	REAR BODY	BRASS	WHITE BRONZE
3	WASHERS	BRASS	WHITE BRONZE
2	INSULATOR	PTFE	N/A
1	CENTRE CONTACT	PHOSPHOR BRONZE	SILVER
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	D00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	12/02/18
		CHK'D	GE	13/02/18
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				