


## N TYPE STRAIGHT EASYFIT/TOP HAT CLAMP PLUG 25-017-B3-DH




images for illustration purposes only

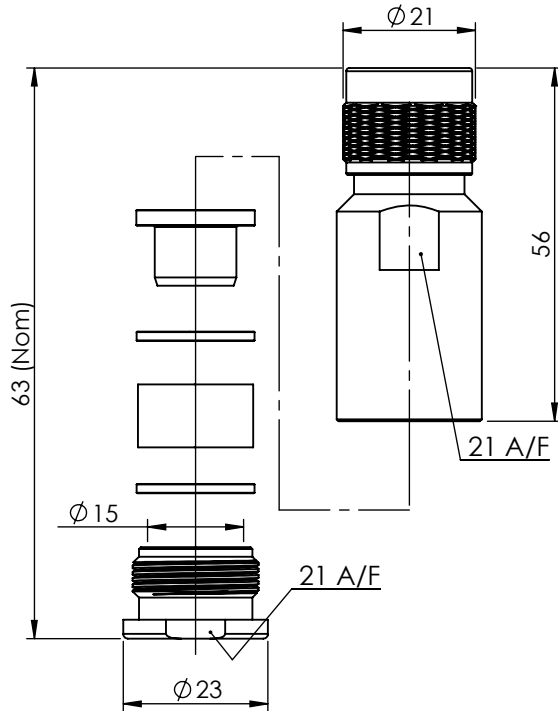

### Suitable for Cables:

(DH) LMR600

### Stripping Dimensions



a = 7.0 mm  
b = 4.0 mm  
c = 11.0 mm  
d = 4.0 mm

### Assembly Procedure: AP032

### Tooling

Centre Contact: Not Applicable      Tool No: Not Applicable

Crimp Sleeve: Not Applicable      Tool No: Not Applicable

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 65

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-11 GHz

Dielectric W/V: 2500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 27 N min

Cable Retention: 200 N min

Mating cycles: 500

Weight: 111.85 g

### Connector Interface

image for illustration purposes only



9	CLAMPING GASKET	SILICONE	N/A
8	RETAINING RING	PHOSHOR BRONZE	NICKEL
7	WASHERS	BRASS	NICKEL
6	COUPLING NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	GE	13/11/2012
		CHK'D	IG	13/11/2012
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				