



N JACK CRIMP RG59

25-054-B6-AI

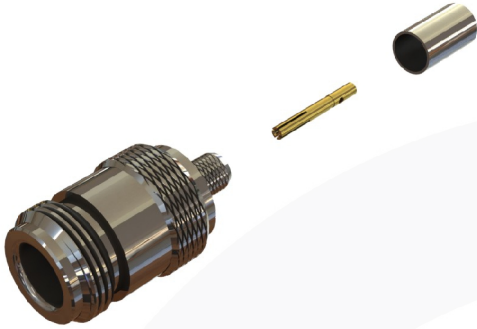


images for illustration purposes only

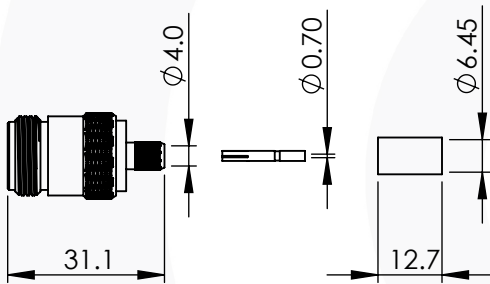

Suitable for Cables:

(AI) RG59, URM104, URM70, RG62, KX6, KX52, KX30

Stripping Dimensions



- a = 4.0 mm
- b = 8.0 mm
- c = 16.0 mm
- d = 12.0 mm

Assembly Procedure: AP001

Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336A

Crimp Sleeve: Hex 6.50mm A/F Tool No: 336A

Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155

IP Rating (Mated): IP 67

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-10 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min

Cable Retention: 150 N min

Mating cycles: 250

Weight: 29.20 g

| 5 | FERRULE | BRASS | NICKEL |
|------|----------------|----------|---------|
| 4 | CENTRE CONTACT | BRASS | GOLD |
| 3 | REAR BODY | BRASS | NICKEL |
| 2 | INSULATOR | PTFE | N/A |
| 1 | BODY | BRASS | NICKEL |
| ITEM | DESCRIPTION | MATERIAL | PLATING |

| | | | | |
|--|--------------|-------------------------------|-----------|------------|
| A4 | SHEET 1 OF 1 | DIMENSIONS ARE IN MILLIMETRES | | |
| REVISION : | B00 | NAME | SIGNATURE | DATE |
| ISSUE : | 1 | DRAWN | IG | 24/11/2010 |
| | | CHK'D | GE | 30/11/2010 |
| | | APP'V'D | | |
| 6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR | | | | |
| <small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small> | | | | |