


## N TYPE B/H CRIMP JACK RG58

### 25-255-B3-AH




images for illustration purposes only

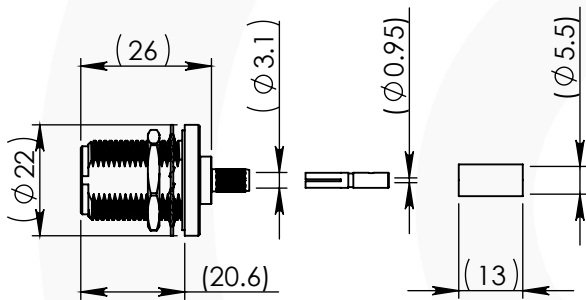

### Suitable for Cables:

RG58, RG141, LMR195, URM43, URM76, WBC195, PSF 1/6, KX15, KX23

### Stripping Dimensions

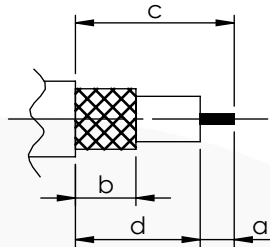

a = 4.0 mm  
b = 8.0 mm  
c = 14.5 mm  
d = 10.5 mm

### Assembly Procedure:

#### Tooling

Centre Contact: Hex 2.54mm A/F Tool No: 336G

Crimp Sleeve: Hex 5.41mm A/F Tool No: 336G

Alignment Tool:

Extraction:

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-10 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 250

Weight: 34.69 g

### Connector Interface

image for illustration purposes only



9	FERRULE	BRASS	NICKEL
8	CENTRE CONTACT	PhBr	GOLD
7	BODY	BRASS	NICKEL
6	SPRING WASHER	SS	NICKEL
5	REAR BODY	BRASS	NICKEL
4	NUT	BRASS	NICKEL
3	GASKET	SILICONE	N/A
2	INSULATOR	PTFE	N/A
1	FRONT BODY	BRASS	NICKEL

ITEM	DESCRIPTION	MATERIAL	PLATING
<b>A4</b>	SHEET 1 OF 1		
REVISION : B00		DIMENSIONS ARE IN MILLIMETRES	
ISSUE : 1		NAME	SIGNATURE
		DATE	
DRAWN		IG	31/05/2011
CHK'D		GE	31/05/2011
APPV'D			
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>			