



## N TYPE B/H EASYFIT / SOLDER JACK 25-267-1-H3-HB

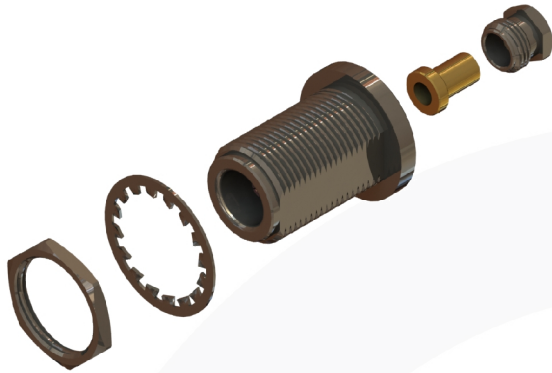


images for illustration purposes only

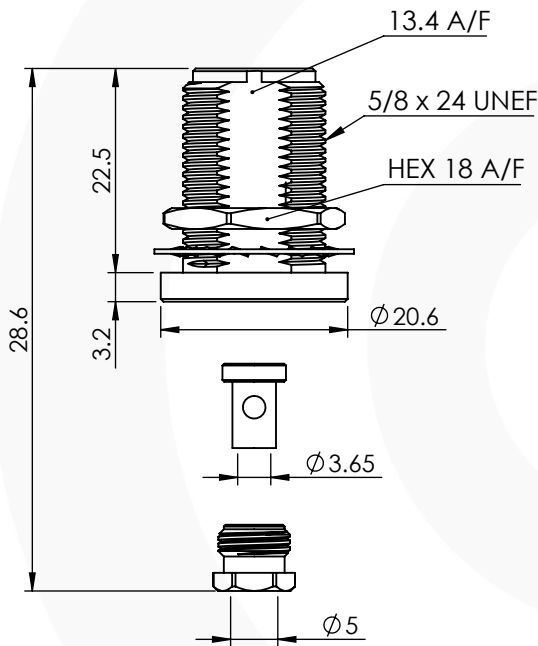

### Suitable for Cables:


(HB) RG402 (0.141"), UT141

### Stripping Dimensions



a = 2.5 mm

### RECOMMENDED MOUNTING:

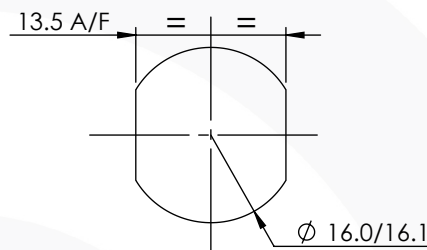

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 44

### Electrical Specification

Impedance: 50 Ohm

Frequency: 0-18 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 150 N min

Mating cycles: 500

Weight: 36.67 g

### Connector Interface

image for illustration purposes only



7	LOCK WASHER	STAINLESS STEEL	PASSIVATED
6	NUT	STAINLESS STEEL	PASSIVATED
5	CLAMP NUT	STAINLESS STEEL	PASSIVATED
4	SOLDER SLEEVE	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	STAINLESS STEEL	PASSIVATED
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	28-Mar-18
		CHK'D	I.G.	28-Mar-18
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				