



## 50 Ohm N TYPE BULKHEAD SOLDER CUP JACK (1 FLATS)


### 25-350-B3

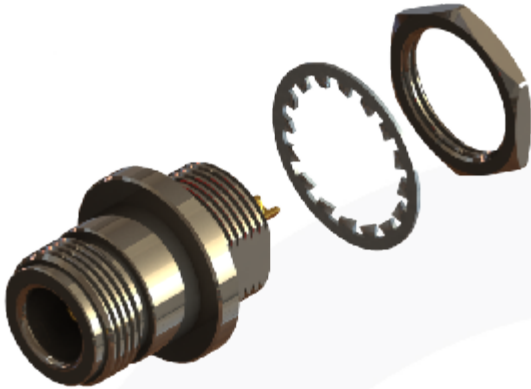

images for illustration purposes only

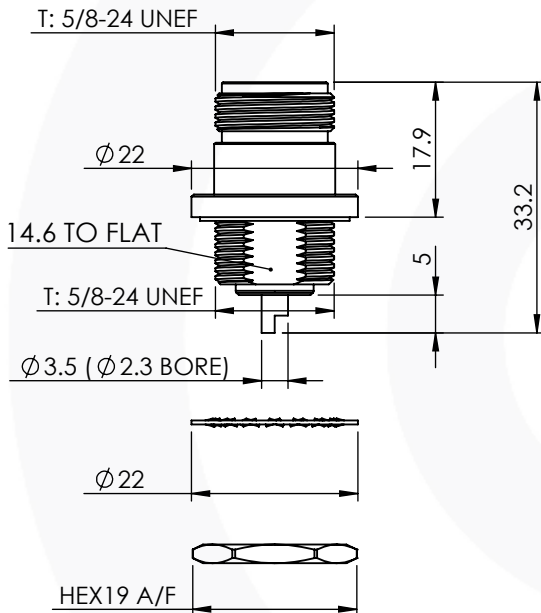

### Recommended Mounting Hole

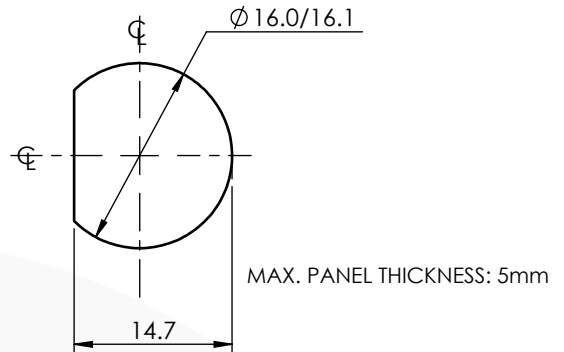

### Tooling

Centre Contact: Not Applicable      Tool No: Solder  
Crimp Sleeve: Not Applicable      Tool No: Not Applicable

### Environmental Specification

Operating Temp: -55 to +155 Deg C.  
IP Rating (Mated): IP 67

### Electrical Specification


Impedance: 50 Ohm  
Frequency: 0-2 GHz  
Dielectric W/V: 2500 Veff  
Insulation res: 5000 M-Ohm

### Mechanical Specification

Contact Retention: 27 N min  
Cable Retention: Not Applicable  
Mating cycles: 500  
Weight: 39.33 g

### Connector Interface

image for illustration purposes only



6	WASHER	STAINLESS STEEL	NICKEL
5	GASKET	SILICONE	N/A
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOS. BRONZE	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	14/04/20
		CHK'D	P.S.	14/04/20
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR <small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				