



## N TYPE 4 HOLE 17.5mm SQ. FLANGE MOUNT SOLDER SPILL JACK

### 25-371-Q3

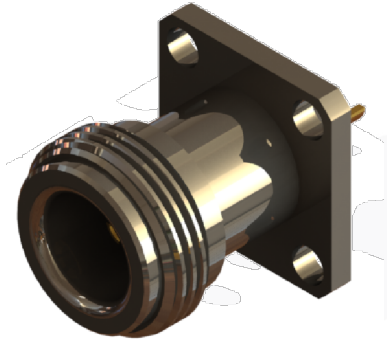

images for illustration purposes only

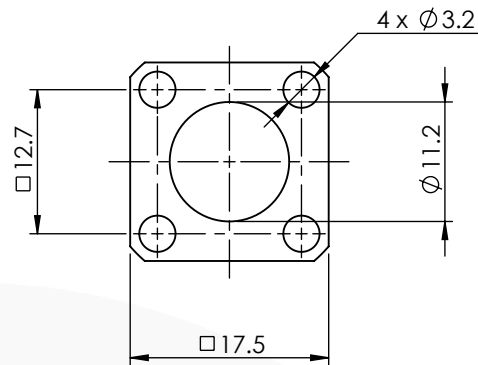

### FLANGE MOUNTING HOLES

#### Tooling

Centre Contact: Solder                      Tool No: Solder  
 Crimp Sleeve: Not Applicable        Tool No: Not Applicable  
 Alignment Tool: Not Applicable        Extraction: Not Applicable

#### Environmental Specification

Operating Temp: -55 to +155 Deg C.  
 IP Rating (Mated): IP 40

#### Electrical Specification



Impedance: 50 Ohm  
 Frequency: 0-11 GHz  
 Dielectric W/V: 1500 Veff  
 Insulation res: 5000 M-Ohm

#### Mechanical Specification

Contact Retention: 27 N min  
 Cable Retention: N/A  
 Mating cycles: 500  
 Weight: 29.5 g

#### Connector Interface

image for illustration purposes only

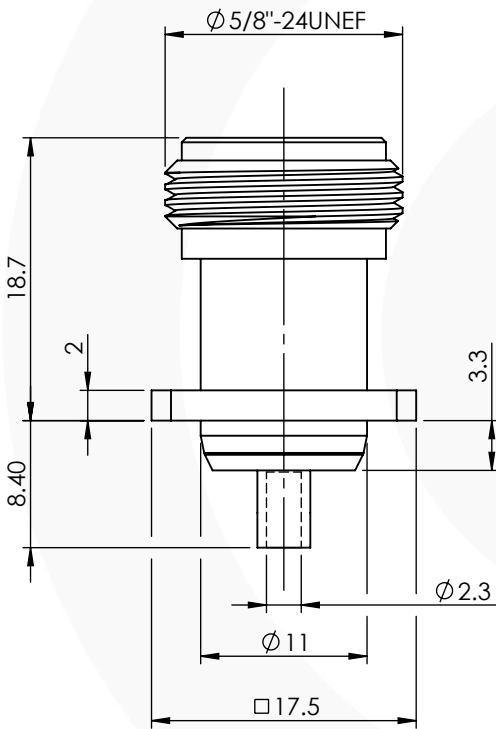

5	CONTACT	PH. BRONZE	GOLD
4	INSULATOR	PTFE	N/A
3	BODY	BRASS	WHITE BRONZE
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	28/04/2021
		CHK'D	P.P.	28/04/2021
		APP'V'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				