PRODUCT DATASHEET

N TYPE 4 HOLE 17.5mm FLANGE N TYPE STRAIGHT JACK - EXTENDED INSULATOR

25-373-17,5-J3-11,8

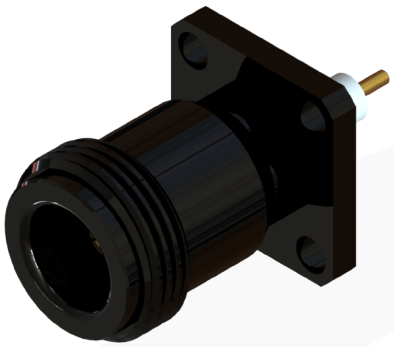

images for illustration purposes only

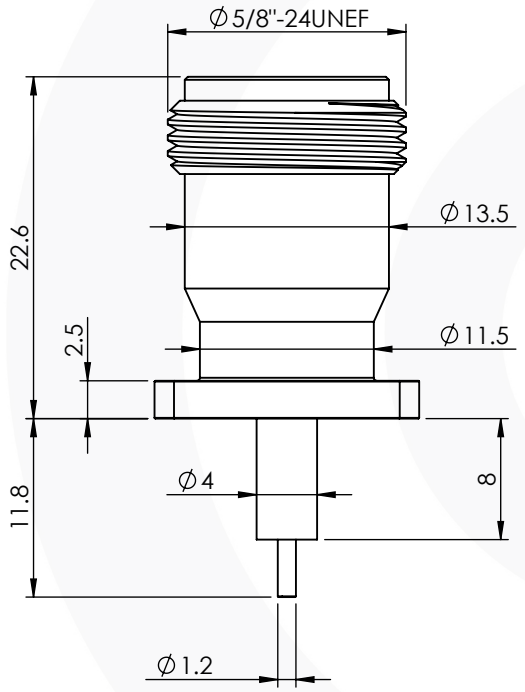

FLANGE MOUNTING HOLES

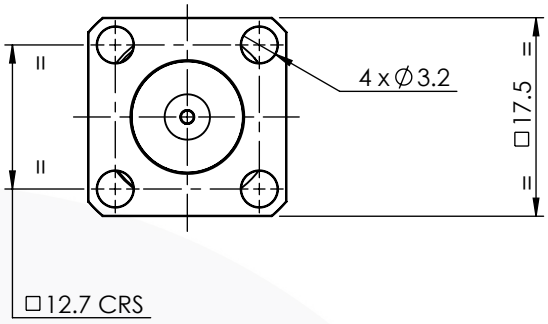

Tooling

Centre Contact: Solder — Tool No: Not Applicable

Crimp Sleeve: Not Applicable — Tool No: Not Applicable

Alignment Tool: Not Applicable — Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-11 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min

Cable Retention: N/A

Mating cycles: 500

Weight: 20.76g

Connector Interface

image for illustration purposes only



ITEM	DESCRIPTION	MATERIAL	PLATING
3	CONTACT	BERYLLIUM COPPER	GOLD
2	INSULATOR	PTFE	N/A
1	FRONT BODY	BRASS	BLACK NICKEL

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A00		
ISSUE :	1		

	NAME	SIGNATURE	DATE
DRAWN	G.E.		22/05/19
CHK'D	I.G.		22/05/19
APPV'D			

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS,WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

© 2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

Model File: C:\Fusion Components Ltd\CAD Data\Solid Models\Z - Match IT SERIES\TOP LEVEL\N 10925

Cad File: C:\Fusion Components Ltd\CAD Data\Drawings\Z - Match IT SERIES\DATA SHEETS\25-373-17.5-J3-11.8