



N TYPE STRAIGHT 4 HOLE FLANGED JACK WITH EXTENDED DIELECTRIC


25-373-25,4-H3-17,9

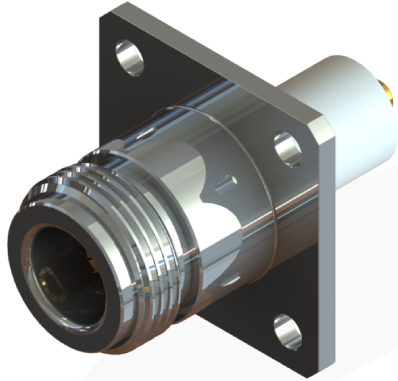

images for illustration purposes only

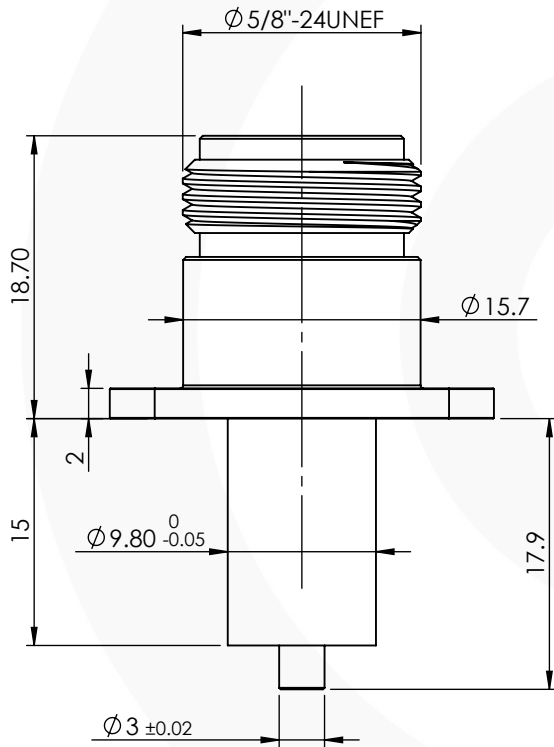

FLANGE MOUNTING HOLES

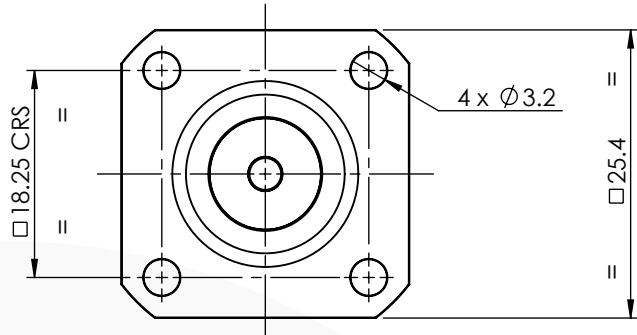

Tooling

Centre Contact: Solder Tool No: Solder
 Crimp Sleeve: Not Applicable Tool No: Not Applicable
 Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.
 IP Rating (Mated): NONE

Electrical Specification


Impedance: 50 Ohm
 Frequency: 0-11 GHz
 Dielectric W/V: 1500 Veff
 Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min
 Cable Retention: N/A
 Mating cycles: 500
 Weight: 29.5 g

Connector Interface

image for illustration purposes only



3	CONTACT	BERYLLIUM COPPER	GOLD
2	INSULATOR	PTFE	N/A
1	FRONT BODY	STAINLESS STEEL	PASSIVATED
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	05/06/19
		CHK'D	I.G.	05/06/19
		APP'V'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				