

© 2008. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

WEBSITE VIDEO No.

DO NOT SCALE DRAWING




**Electrical Specification**  
 Impedance: 50 Ohm  
 Frequency: 0 - 12 Ghz  
 Dielectric W/V: TBC  
 Insulation res: 5000 M-Ohm min

**Mechanical Specification**  
 Centre contact retention  
 Axial Force: 27N  
 Cable Retention: N/A  
 Mating cycles: 500

**Environmental Specification**  
 Operating Temp: -65 to + 165 Deg C

**Tooling**  
 Centre Contact: SOLDER  
 COAX Tool No:  
 Crimp Sleeve: N/A  
 COAX Tool No:

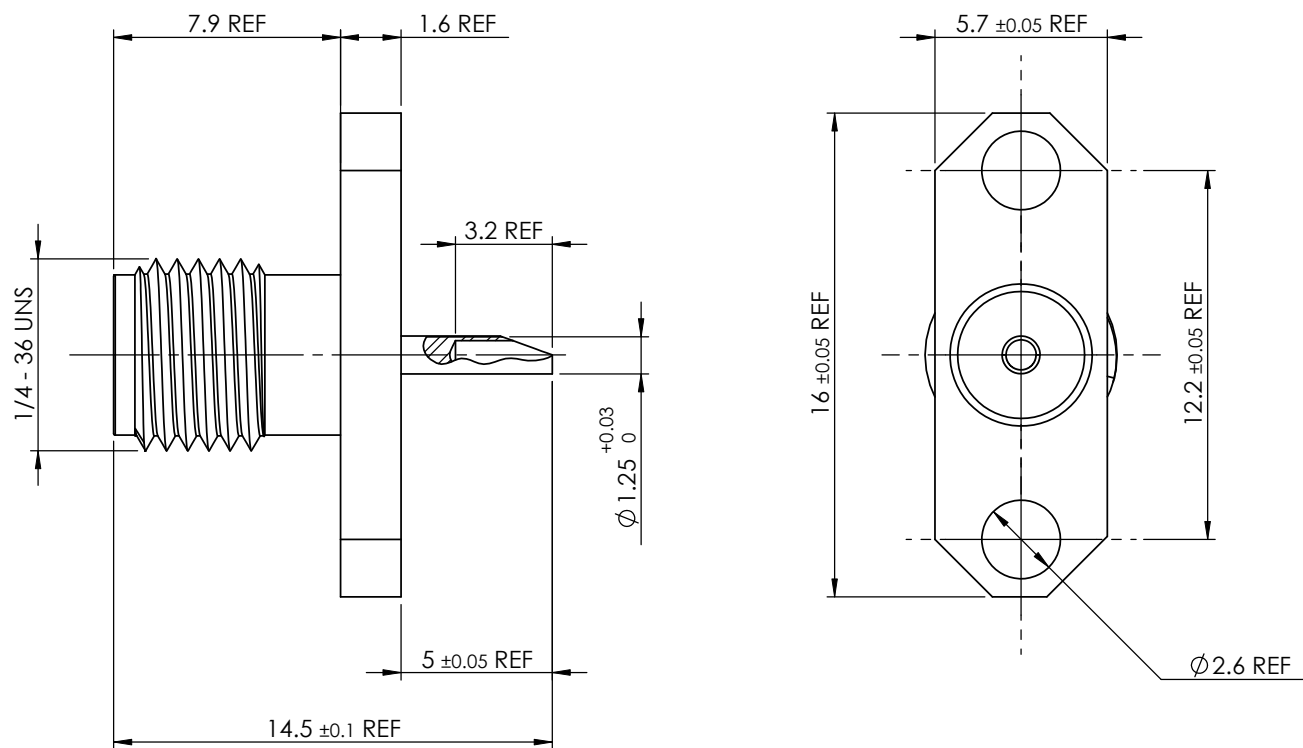

**COAX CONNECTORS LTD**  
 6-8 COLNE ROAD, TWICKENHAM,  
 MIDDLESEX. TW1 4JR

**Description** SMA PANEL JACK (SOLDER BUCKET VERSION)

**Part Number** 30-368-D3

REVISION A00  
 ISSUE 2

DIMENSIONS ARE IN MILLIMETERS			
A4	NAME	SIGNATURE	DATE
DRAWN	GE		17/01/2010
CHK'D	DC		18/01/2010
APPV'D			

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

ITEM	DESCRIPTION	MATERIAL	PLATING
5			
4			
3	CENTRE CONTACT	BeCu	GOLD
2	INSULATOR	PTFE	N/A
1	BODY	BRASS	GOLD