



SMA REVERSE POLARITY CRIMP/CRIMP JACK 31-054-D3-AD

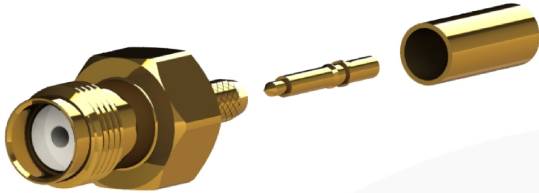


images for illustration purposes only

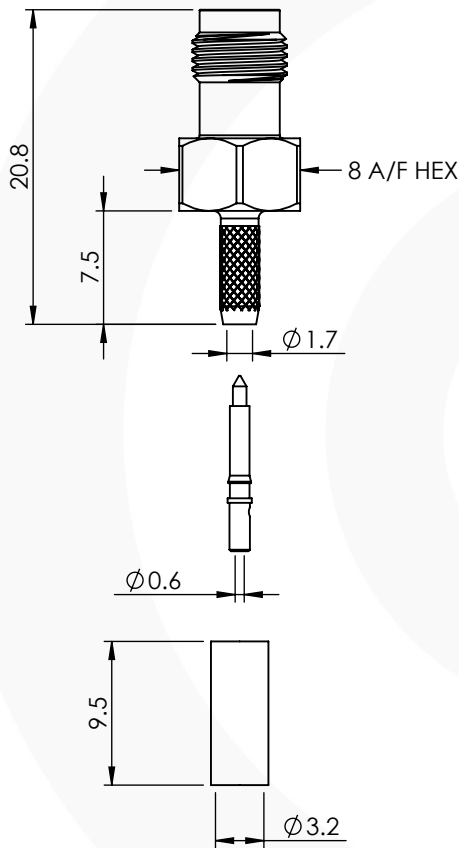

Suitable for Cables:

(AD) RG316, RG174, RG188, LMR100, WBC100, URM95, KX3, KX22

Stripping Dimensions



- a = 3.0mm
- b = 8.0mm
- c = 13.0mm
- d = 10.0mm

* CUT FOIL TO DIM. "b"

Assembly Procedure:

Tooling

Centre Contact: SQ. 1.07 A/F Tool No: 336J

Crimp Sleeve: HEX 3.25 A/F Tool No: 336J

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 67

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-12.5 GHz

Dielectric W/V: 750 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 100 N min

Mating cycles: 100

Weight: 3.23g

Connector Interface

image for illustration purposes only



4	CRIMP SLEEVE	BRASS	GOLD
3	CONTACT	PH. BRONZE	GOLD
2	INSULATOR	PTFE	N/A
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	BS	05/01/2018
		CHK'D	I.G.	24/01/2018
		APP'V'D		
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				