

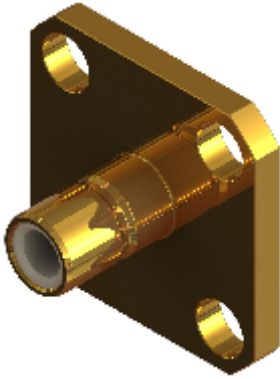


SMB 4 HOLE FLANGE MOUNTED JACK


32-371-D3

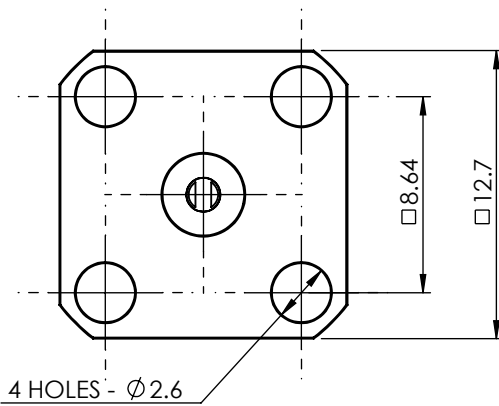

images for illustration purposes only

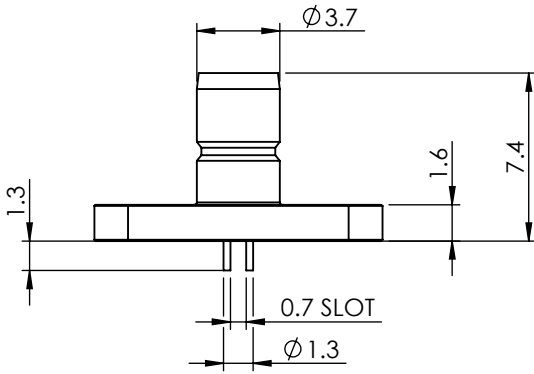

RECOMMENDED MOUNTING HOLE

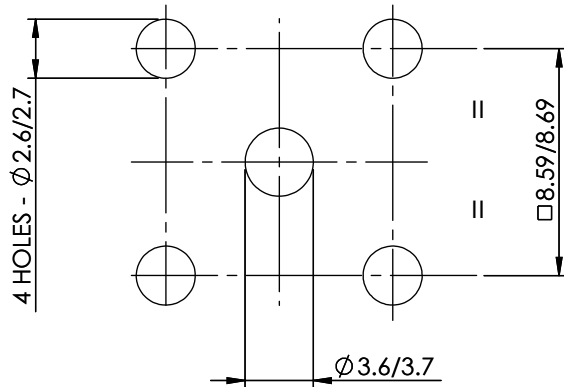

Tooling

Centre Contact: SOLDER

Tool No: N/A

Crimp Sleeve: Not Applicable

Tool No: Not Applicable

Environmental Specification

Operating Temp: -55 to + 105 Deg C

IP Rating (Mated): IP 44

Electrical Specification

Impedance: 50 Ohm

Frequency: 0 - 4 GHz

Dielectric W/V: 500 Veff

Insulation res: 750 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: Not Applicable

Mating cycles: 500

Weight: 2.02 g

Connector Interface

image for illustration purposes only



3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	GE	21/06/2012
		CHK'D	PS	21/06/2012
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				