


1.0/2.3 SCREW LOCK CRIMP/CRIMP PLUG

52-005A-B66-AB



images for illustration purposes only

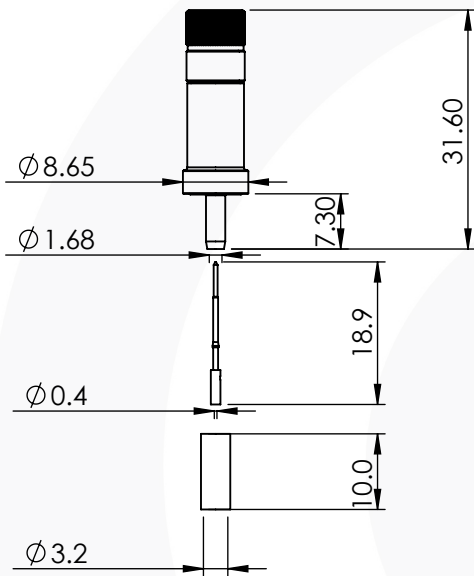


DIN1.0/2.3 Screw Lock Design to prevent signal loss in vibrating environments as recommended by CoaXPress

Suitable for Cables:

(AB) RG179, RG187, Belden 179DT

Stripping Dimensions



a = 4.0 mm
* b = 8.0 mm
c = 16.0 mm
d = 12.0 mm

* STRIP FOIL SCREEN TO DIM "b"

Assembly Procedure: AP001

Tooling

Indent or SQ
Centre Contact: 0.95mm A/F Tool No: HTS-43

Crimp Sleeve: Hex 3.25mm A/F Tool No: HTS-43

Alignment Tool: 100-1023 Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-12 GHz
Dielectric W/V: 750 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: 150 N min
Mating cycles: 500
Weight: 7.40 g


Connector Interface

image for illustration purposes only



15.06 dB @ 1.0 GHz
20.60 dB @ 2.0 GHz
27.02 dB @ 3.0 GHz
16.91 dB @ 4.5 GHz

Return Loss Graph

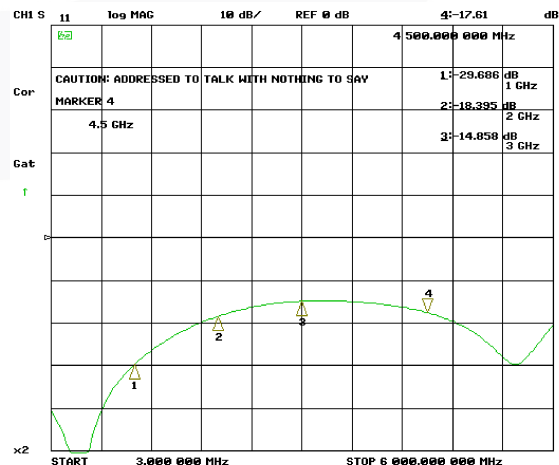

ITEM	DESCRIPTION	MATERIAL	PLATING
8	REAR BODY	BRASS	NICKEL
7	OUTER CONTACT	BERYLLIUM COPPER	GOLD
6	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
5	SPRING	STAINLESS STEEL	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	BODY	BRASS	NICKEL
2	INSULATOR	PTFE	N/A
1	COUPLING NUT	BRASS	NICKEL

A4	SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00		NAME	SIGNATURE	DATE
DRAWN	IG				17/05/2019
ISSUE :	1		CHK'D	GE	18/05/2019
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APP'V'D			<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>