



1.0/2.3 Straight Bulkhead Crimp Jack 52-254-D6-AB

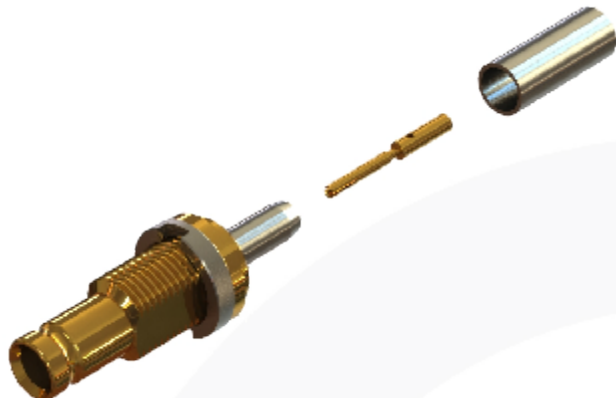


images for illustration purposes only

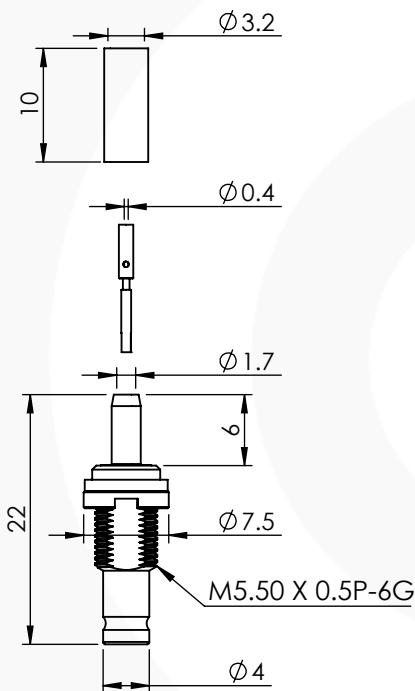

Suitable for Cables:

(AB) RG179, RG187, Belden 179DT

Stripping Dimensions



a = 3.5 mm
b = 6.0 mm
c = 13.0 mm
d = 9.5 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP037 (HTS-43)

Tooling

Centre Contact: 0.95mm A/F Tool No: HTS-43

Crimp Sleeve: Hex 3.25mm A/F Tool No: HTS-43

Castellated Nut Spanner: 96-1135

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-4.5 GHz

Dielectric W/V: 750 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 60 N min

Mating cycles: 500


Weight: 2.20 g

Connector Interface

image for illustration purposes only

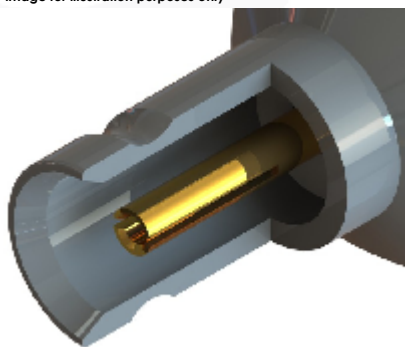

Recommended Mounting Hole



MAX PANEL THICKNESS 5mm

ITEM	DESCRIPTION	MATERIAL	PLATING
7	NUT	BRASS	NICKEL
6	REAR BODY	BRASS	NICKEL
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD

A4 SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
DRAWN	S.O'D.			18/03/2016
ISSUE :	1	CHK'D	I.G.	18/03/2016
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D		
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				