



## 1.0/2.3 RIGHT ANGLE PCB BULKHEAD JACK

### 52-468-4-D36

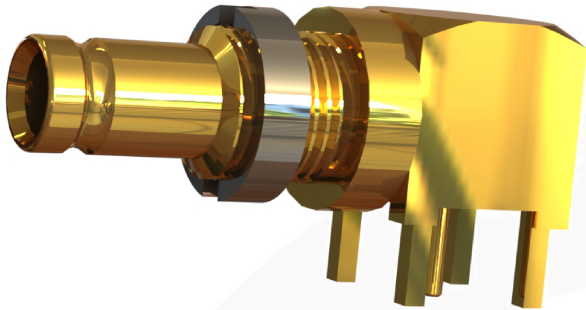

images for illustration purposes only

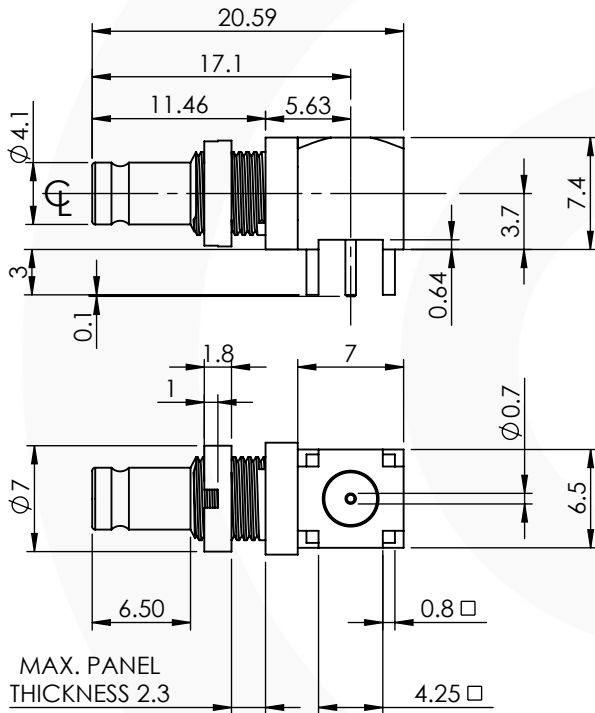

### Suitable for Cables:

N/A

### Tooling

Centre Contact: Not Applicable Tool No: Not Applicable

Crimp Sleeve: Not Applicable Tool No: Not Applicable

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

### Electrical Specification Mechanical Specification

Impedance: 75 Ohm IP40

Contact Retention: 20 N min

Frequency: 0-4.5 GHz

Cable Retention: N/A N min

Dielectric W/V: 750 Veff


Mating cycles: 250

Insulation res: 1000 M-Ohm

Weight: 4.48 g

### Connector Interface


image for illustration purposes only




### Tooling

Castellated nut tool : 96-1139

### Recommended Mounting Hole



### Recommended PCB Layout

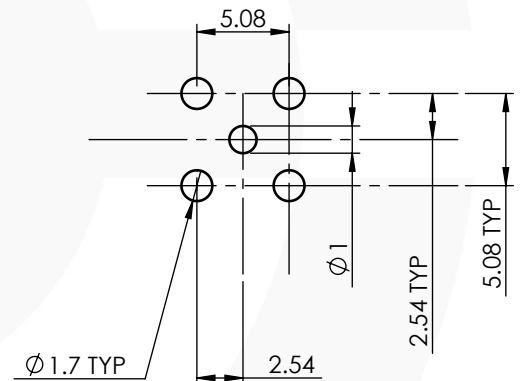

4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	17/02/2017
		CHK'D	GE	18/02/2017
		APPV'D		
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				