



1.0/2.3 RIGHT ANGLE BULKHEAD PCB MOUNT JACK 75 Ohm

52-468-6-D36

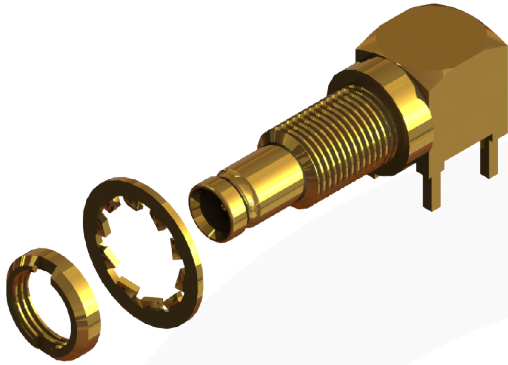

images for illustration purposes only

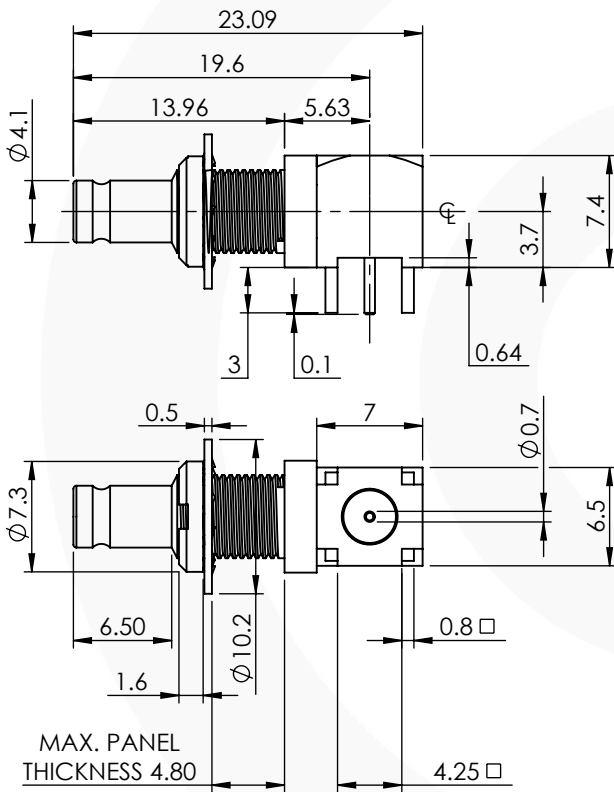

Suitable for Cables:

N/A

Tooling

Centre Contact: Not Applicable Tool No: Not Applicable

Crimp Sleeve: Not Applicable Tool No: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

Electrical Specification Mechanical Specification

Impedance: 75 Ohm IP40

Contact Retention: 20 N min

Frequency: 0-4.5 GHz

Cable Retention: N/A N min

Dielectric W/V: 750 Veff


Mating cycles: 250

Insulation res: 1000 M-Ohm

Weight: 5.11 g

Connector Interface


image for illustration purposes only




Tooling

Castellated nut tool : 96-1138

Recommended Mounting Hole



Recommended PCB Layout

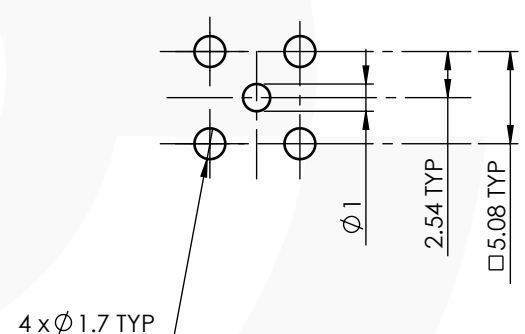

5	WASHER	STAINLESS STEEL	GOLD
4	NUT	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	07/07/2020
		CHK'D	P.S.	07/07/2020
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				