

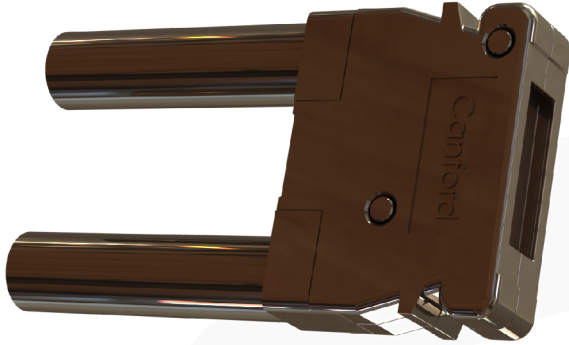


MM U LINK

64-564-D126

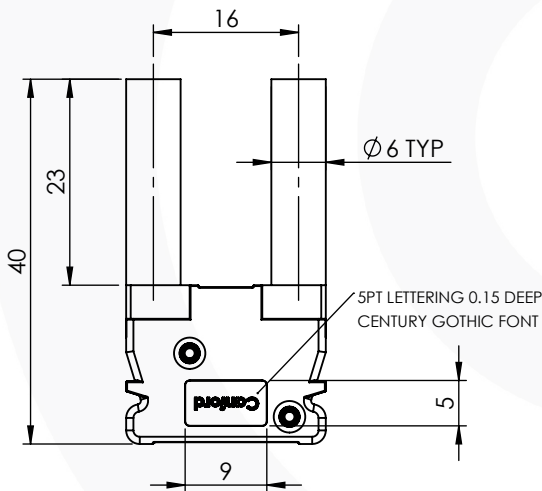

images for illustration purposes only



Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): N/A

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-12 GHz
Dielectric W/V: 1000 Veff
Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: N/A N min
Mating cycles: 5000
Weight: 21.63 g

Connector Interface

image for illustration purposes only



Performance

- 33.50 dB @ 3.0 GHz
- 22.70 dB @ 6.0 GHz
- 18.19 dB @ 9.0 GHz
- 11.73 dB @ 12.0GHz

Return Loss Graph



6	REAR BODY	ZINC	NICKEL
5	OUTER CONTACT	PHOSPHOR BRONZE	NICKEL
4	SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	FRONT BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	F00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	19/07/2017
		CHK'D	GE	20/07/2017
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				