



MICRO BNC STRAIGHT BULKHEAD END LAUNCH JACK


67-463-B126-1.6

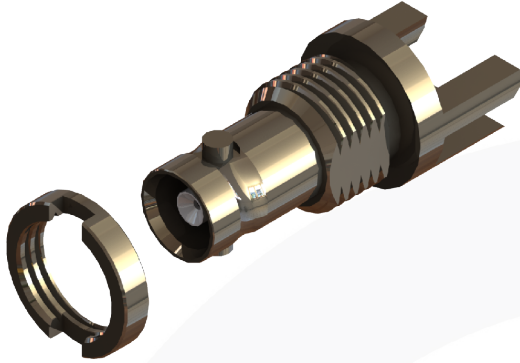

images for illustration purposes only

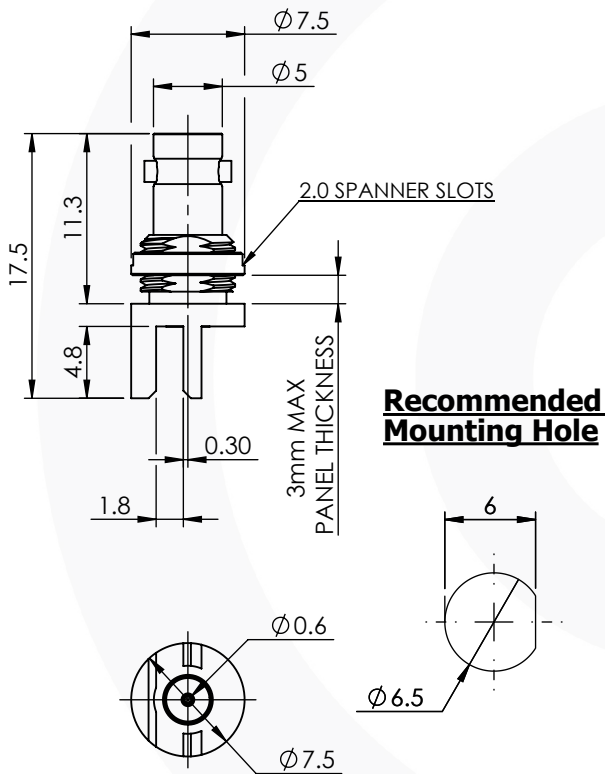

Recommended PCB Layout

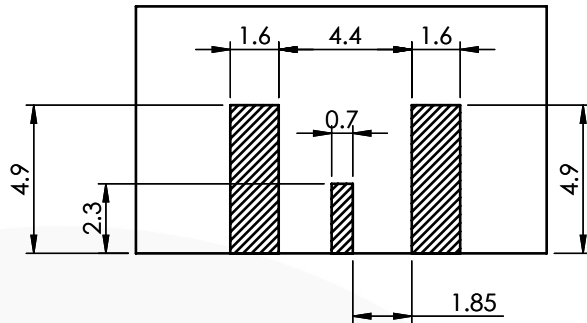

Tooling

Centre Contact: Not Applicable Tool No: Not Applicable

Crimp Sleeve: Not Applicable Tool No: Not Applicable

Castellated Nut Spanner: 96-1135 (MAX TORQUE - 115Ncm)

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 1000 M-Ohm

Mechanical Specification

Contact Retention: 15 N min


Cable Retention: N/A N min

Mating cycles: 500

Weight: 2.68 g


Connector Interface

image for illustration purposes only



-23.85 dB @ 3.0 GHz
 -16.15 dB @ 6.0 GHz
 -12.93 dB @ 12.0 GHz
 -9.68 dB @ 18.0 GHz

Return Loss Graph

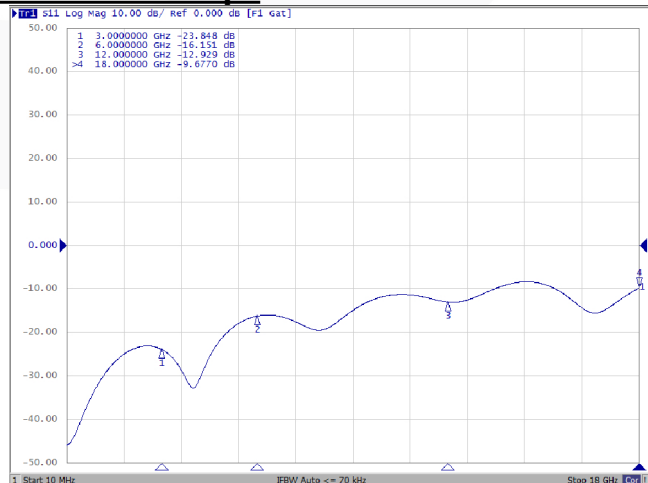

4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	22/06/2020
		CHK'D	P.S.	22/06/2020
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				