




## MICRO BNC STRAIGHT BULKHEAD END LAUNCH JACK 67-463-D66-2.1

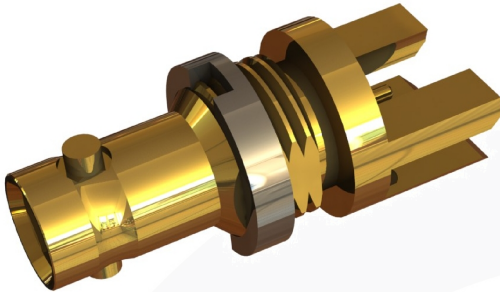


images for illustration purposes only

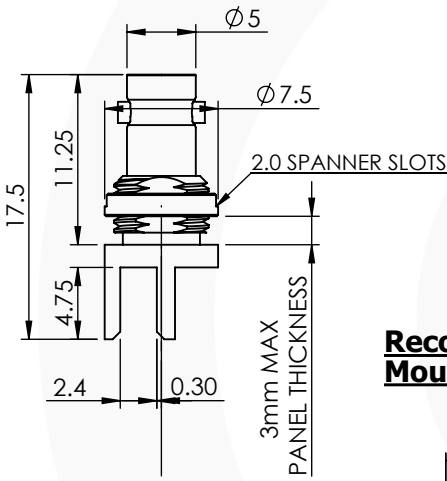

### Recommended Mounting Hole

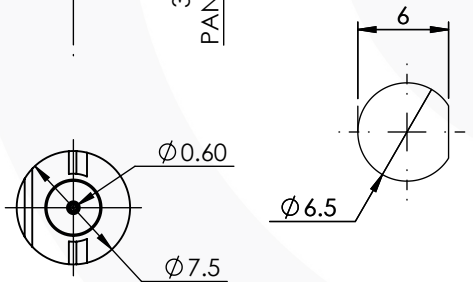

### Recommended PCB Layout

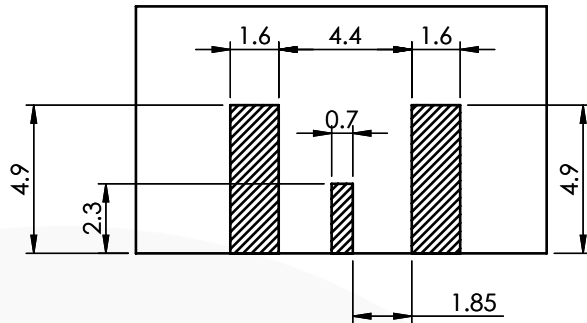

### Tooling

- Centre Contact: Not Applicable Tool No: Not Applicable
- Crimp Sleeve: Not Applicable Tool No: Not Applicable
- Castellated Nut Spanner: 96-1135 ( MAX TORQUE - 115Ncm )

### Environmental Specification

- Operating Temp: -55 to +155 Deg C.
- IP Rating (Mated): IP64

### Electrical Specification


- Impedance: 75 Ohm
- Frequency: 0-12 GHz
- Dielectric W/V: 1000 Veff
- Insulation res: 1000 M-Ohm

### Mechanical Specification

- Contact Retention: 15 N min
- Cable Retention: N/A N min
- Mating cycles: 500
- Weight: 2.60 g


### Connector Interface

image for illustration purposes only



- 23.85 dB @ 3.0 GHz
- 16.15 dB @ 6.0 GHz
- 12.93 dB @ 12.0 GHz
- 9.68 dB @ 18.0 GHz

### Return Loss Graph

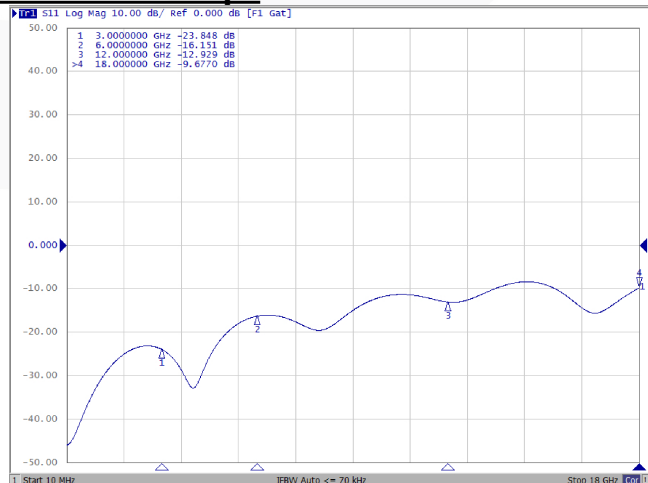

4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A01	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	09/11/2017
		CHK'D	I.G.	09/11/2017
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				