



MICRO BNC RIGHT ANGLE BULKHEAD PCB JACK


67-468-2-D66

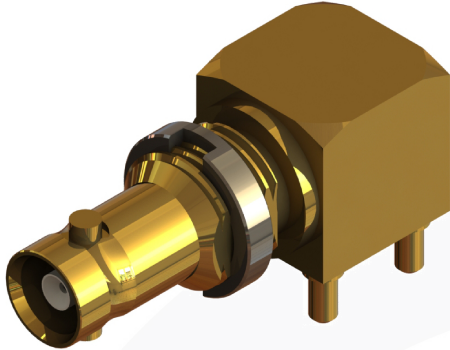


images for illustration purposes only

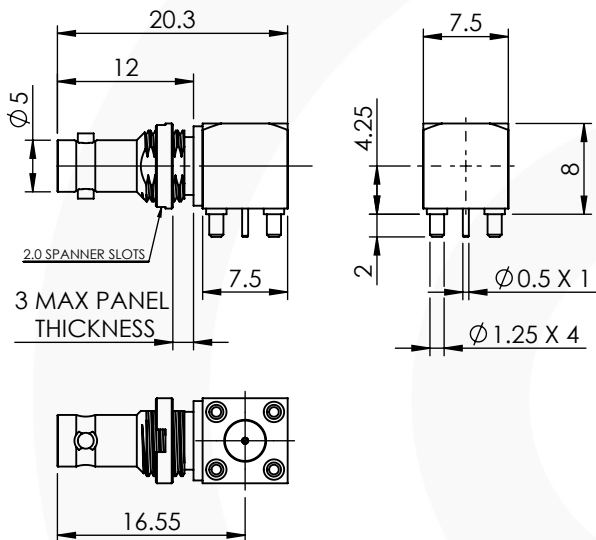

Recommended Mounting Hole



Recommended PCB Layout

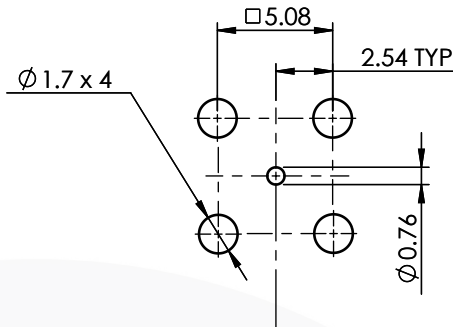

Tooling

Castellated Nut Spanner: 96-1135 (MAX TORQUE - 115Ncm.)

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-6.0 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 15 N min


Cable Retention: N/A

Mating cycles: 500

Weight: 4.69 g


Connector Interface

image for illustration purposes only



- 21.35dB @ 1.0 GHz
- 31.07dB @ 3.0 GHz
- 16.79dB @ 4.5 GHz
- 15.17dB @ 6.0 GHz

Return Loss Graph

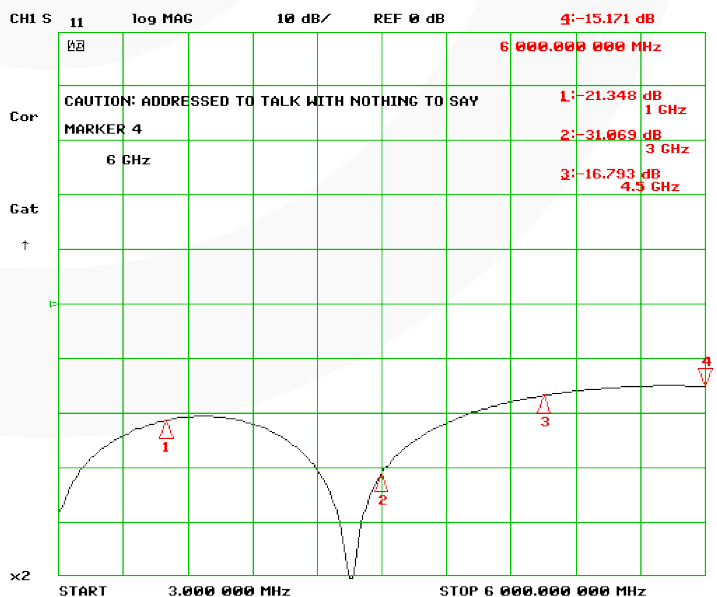

5	NUT	BRASS	NICKEL
4	REAR BODY	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	C02	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	GE	10/07/2014
		CHK'D	PS	10/07/2014
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				