




MICRO BNC RIGHT ANGLE BULKHEAD PCB JACK 67-468-5-D126

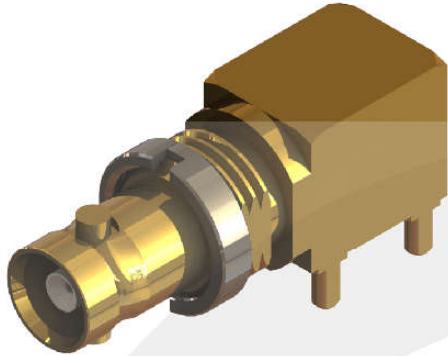


images for illustration purposes only

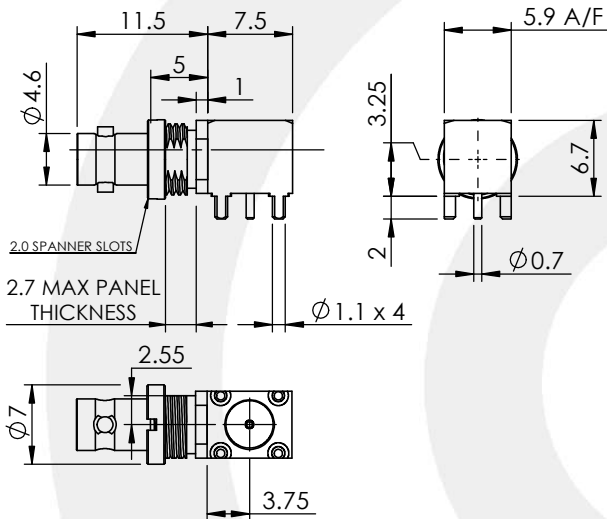

Recommended Mounting Hole

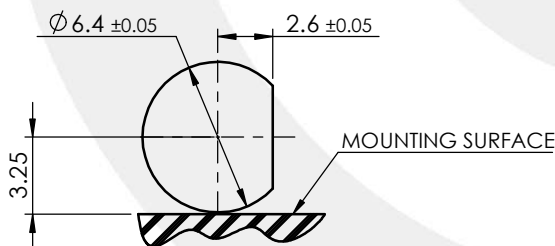

Recommended PCB Layout

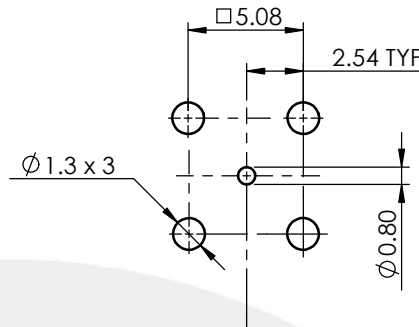

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 64

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-12.0 GHz
Dielectric W/V: 500 Veff
Insulation res: 1000 M-Ohm

Mechanical Specification


Contact Retention: 15 N min
Cable Retention: N/A
Mating cycles: 500
Weight: 3.30 g

Connector Interface

image for illustration purposes only



5	NUT	BRASS	NICKEL
4	REAR BODY	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	 DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	21/11/2019
		CHK'D	P.P.	21/11/2019
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				