



MICRO BNC RIGHT ANGLE BULKHEAD PCB JACK


67-468-D66

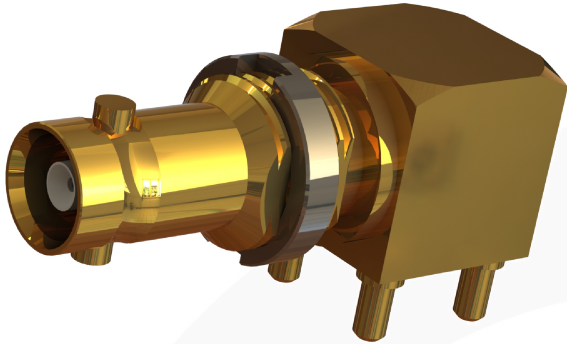


Recommended PCB Layout

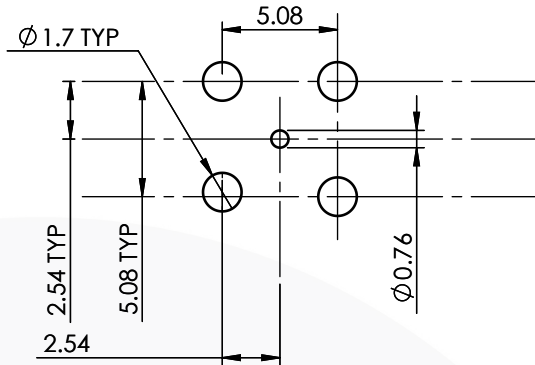

Images for illustration purposes only

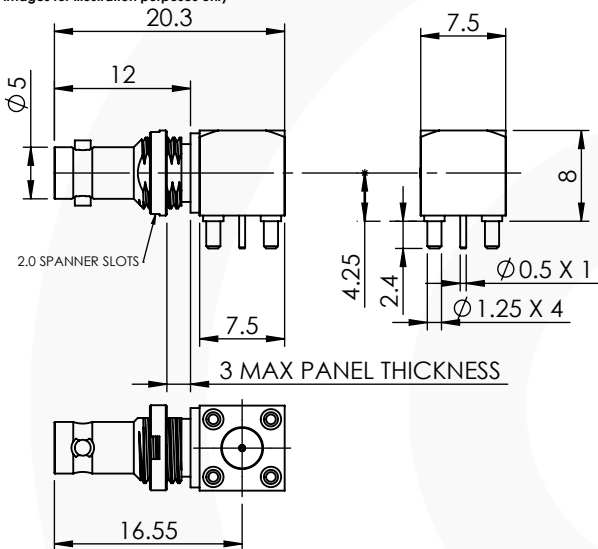

Recommended Mounting Hole

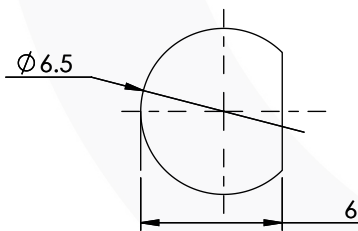

Tooling

Centre Contact: Not Applicable Tool No: Not Applicable
 Crimp Sleeve: Not Applicable Tool No: Not Applicable
 Castellated Nut Spanner: 96-1135 (MAX TORQUE - 115Ncm)

Environmental Specification

Operating Temp: -55 to +155 Deg C.
 IP Rating (Mated): IP64

Electrical Specification


Impedance: 75 Ohm
 Frequency: 0-12 GHz
 Dielectric W/V: 1000 Veff
 Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 15 N min
 Cable Retention: N/A N min
 Mating cycles: 500
 Weight: 4.71 g


Connector Interface

image for illustration purposes only



-19.54 db @ 3.0 GHz
 -14.57 db @ 6.0 GHz
 -11.72 db @ 12.0 GHz
 -9.57 db @ 18.0 GHz

Return Loss Graph

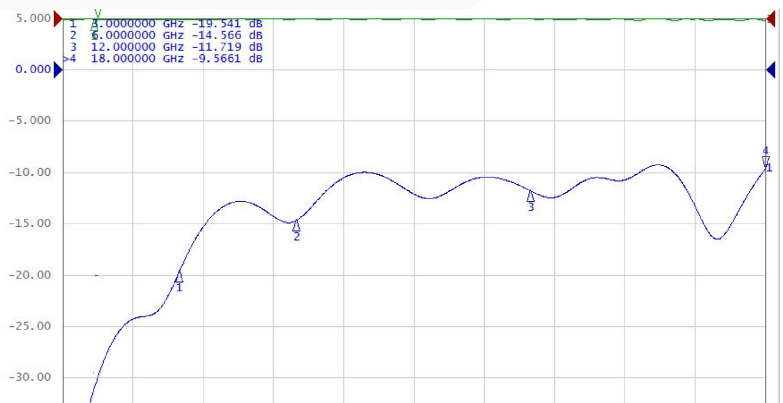

5	NUT	BRASS	NICKEL
4	REAR BODY	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	E02	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	17/05/2012
		CHK'D	GE	24/05/2012
		APP'V'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				