




## MICRO BNC STRAIGHT PCB JACK 3 LEGS 75 OHMS 67-476-D66-12.25



images for illustration purposes only

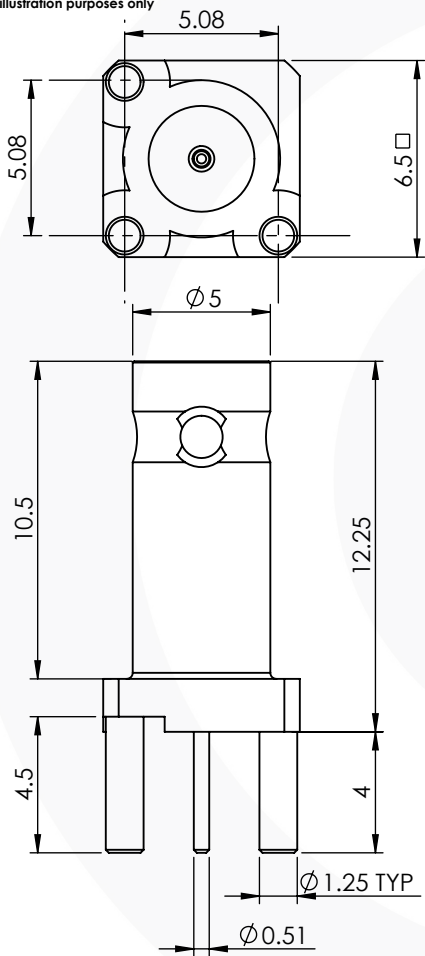

### Recommended PCB Mounting Hole

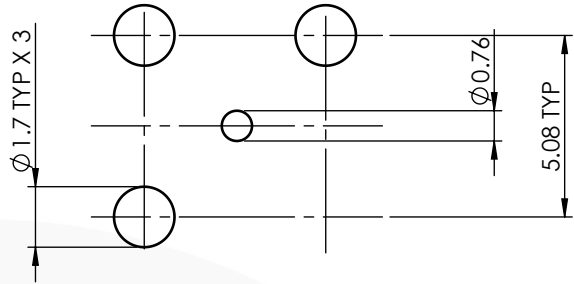

### Tooling

Centre Contact: Solder

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP64

### Electrical Specification

Impedance: 75 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 1000 Veff

Insulation res: 1000 M-Ohm


### Mechanical Specification

Mating cycles: 500

Weight: 1.20 g

### Connector Interface

image for illustration purposes only

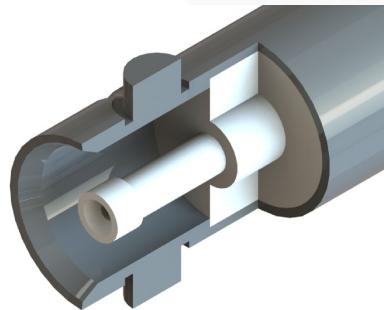

3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B01	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	21/02/2012
		CHK'D	GE	21/02/2012
		APPV'D		
<b>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</b>				
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>				