



MICRO BNC ANGLED PCB BULKHEAD JACK


67-492-D66



images for illustration purposes only

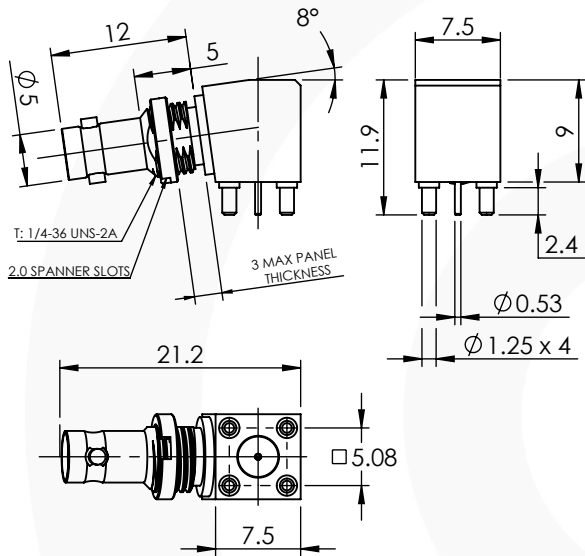


Recommended Mounting Hole



Recommended PCB Layout

Not Applicable

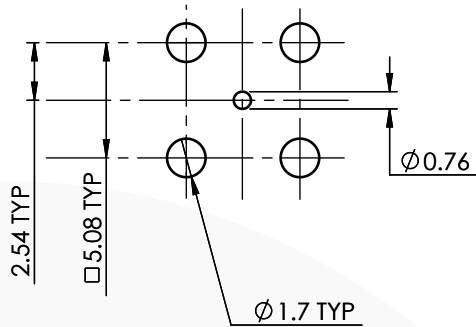

Tooling

- Centre Contact: Not Applicable Tool No: Not Applicable
- Crimp Sleeve: Not Applicable Tool No: Not Applicable
- Castellated Nut Spanner: 96-1135 (MAX TORQUE - 115Ncm)

Environmental Specification

- Operating Temp: -55 to +155 Deg C.
- IP Rating (Mated): IP 54

Electrical Specification


- Impedance: 75 Ohm
- Frequency: 0-6 GHz
- Dielectric W/V: 1000 Veff
- Insulation res: 5000 M-Ohm

Mechanical Specification

- Contact Retention: 15 N min
- Cable Retention: Not Applicable
- Mating cycles: 500
- Weight: 5.61 g

Connector Interface

image for illustration purposes only



5	NUT	BRASS	NICKEL
4	REAR BODY	BRASS	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	05/10/2020
		CHK'D	P.S.	05/10/2020
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				