



MICRO BNC STRAIGHT BULKHEAD PLUG TO JACK ADAPTOR


67-512-B66

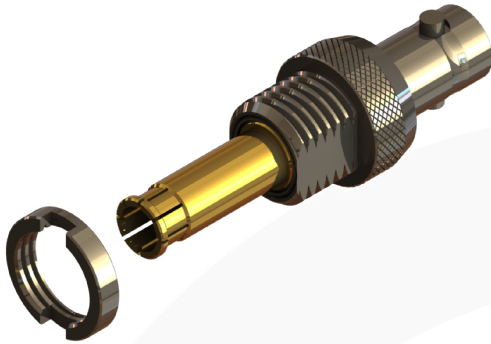

images for illustration purposes only

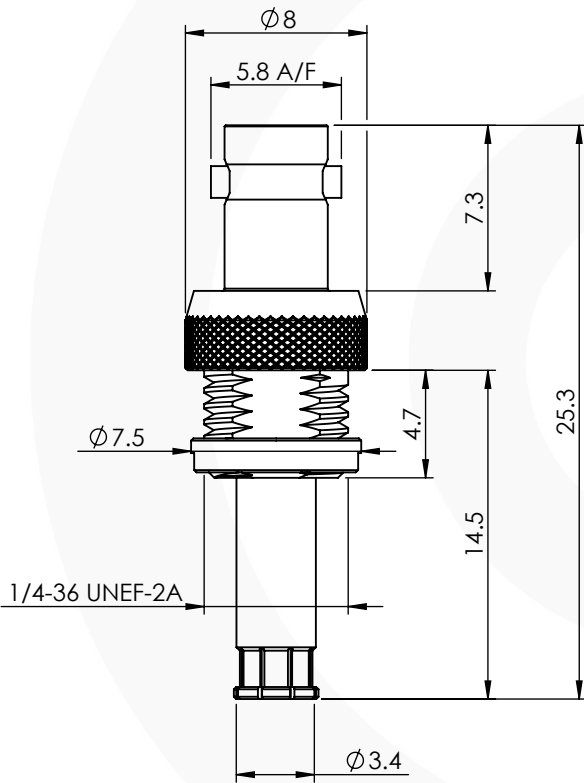

Recommended Mounting Hole



Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): NONE

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 15 N min


Cable Retention: Not Applicable

Mating cycles: 500

Weight: 3.01 g

Connector Interface

image for illustration purposes only

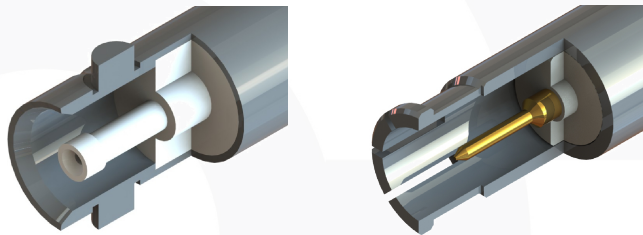

Performance

- 25.68 dB @ 3.0 GHz
- 23.76 dB @ 6.0 GHz
- 21.10 dB @ 9.0 GHz
- 17.73 dB @ 12.0 GHz

Return Loss Graph



5	NUT	BRASS	NICKEL
4	OUTER CONTACT	BERYLLIUM COPPER	GOLD
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A02	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	GE	10/03/2015
		CHK'D	IG	10/03/2015
		APPV'D		
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				