



MICRO BNC PLUG TERMINATION 75 Ohm 67-863-B36

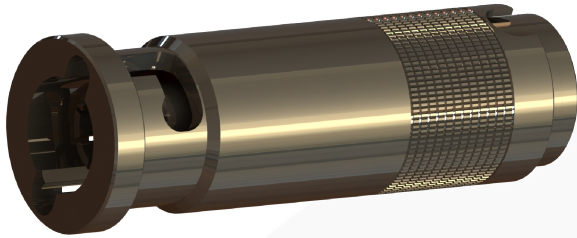

images for illustration purposes only

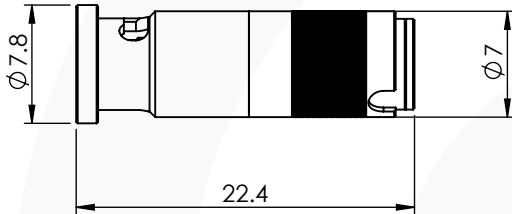

LOCATION SLOT
FOR INSERTION TOOL
(RANDOM ORIENTATION)



Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm
Frequency: 0-12 GHz
Dielectric W/V: 1000 Veff
Insulation res: 10000 M-Ohm
Return Loss: -30dB @ 3GHz

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: N/A
Mating cycles: 500
Weight: 4.50 g

Connector Interface





image for illustration purposes only

Tooling

Extraction Tool : 96-1132

Return Loss Graph

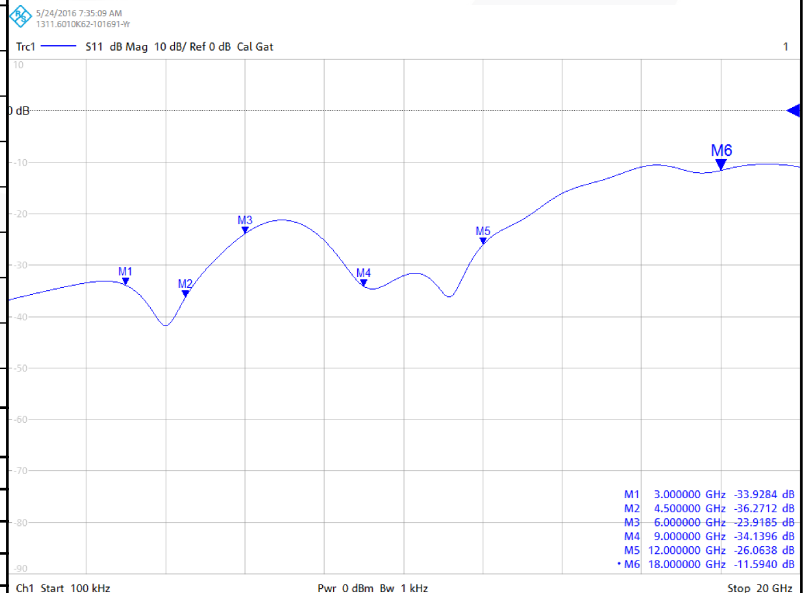

ITEM	DESCRIPTION	MATERIAL	PLATING
8	RESISTOR	METAL FILM	N/A
7	CONDUCTIVE GASKET	RUBBER	N/A
6	COUPLING NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	REAR BODY	BRASS	TIN
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL

A4 SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B06	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	25/03/2013
		CHK'D	GE	26/03/2013
		APP'V'D		

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.