


## BNC STRAIGHT PLUG TO F JACK ADAPTOR


### 74-1015-511

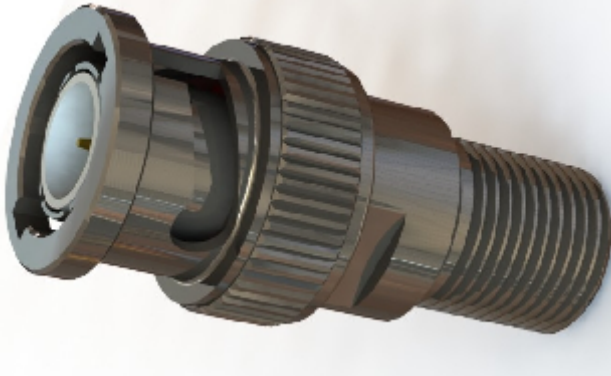

images for illustration purposes only

3/8-32 UNEF THREAD

9.5 A/F

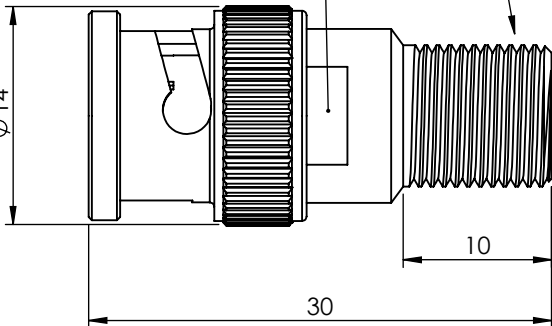

#### Suitable for Cables:

N/A

#### Assembly Procedure:

N/A

#### Tooling

Centre Contact: Not Applicable      Tool No: Not Applicable

Crimp Sleeve: Not Applicable      Tool No: Not Applicable

#### Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP64

#### Electrical Specification

Impedance: 75 Ohm

Frequency: 0-500 MHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

#### Mechanical Specification

Contact Retention: 10 N min



Cable Retention: N/A N min

Mating cycles: 250

Weight: 15.90 g

#### Connector Interface

image for illustration purposes only



6	WASHERS	SK5	NICKEL
5	BAYONET CAP	ZINC	NICKEL
4	GASKET	SILICONE	N/A
3	INSULATOR	DELRIN	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	IG	08/08/2012
		CHK'D	GE	15/08/2012
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				