



1.0/2.3 STRAIGHT PLUG TO BNC JACK ADAPTOR

74-1052-534-B36

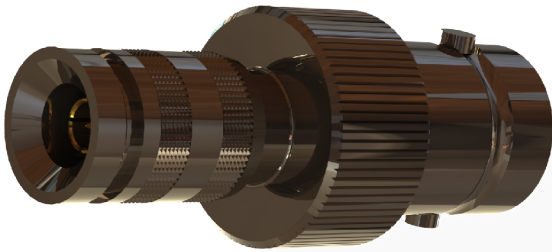

images for illustration purposes only

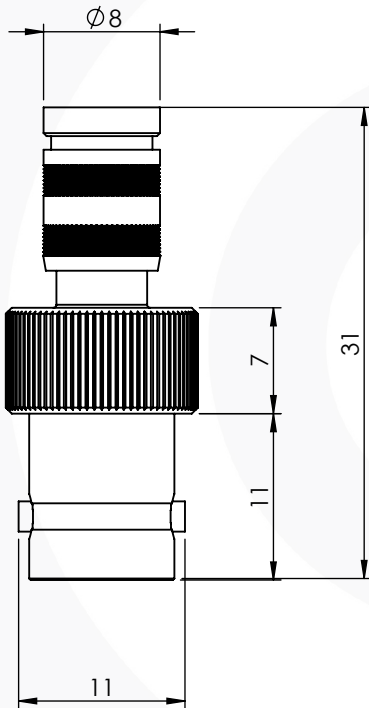

Environmental Specification


Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): NONE

Electrical Specification Mechanical Specification

Impedance: 75 Ohm	Contact Retention: 10 N min
Frequency: 0-18 GHz	Cable Retention: N/A
Dielectric W/V: 1500 Veff	Mating cycles: 500
Insulation res: 5000 M-Ohm	Weight: 12.42 g

Connector Interface

image for illustration purposes only

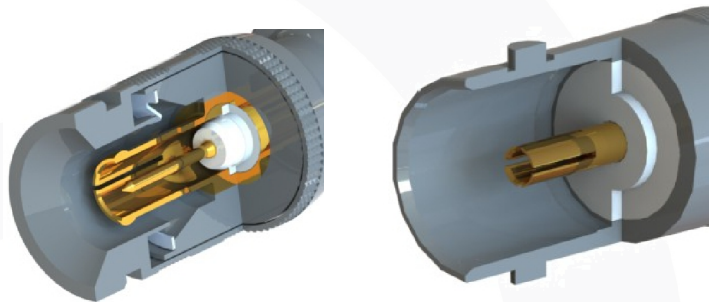

Performance

-20.72 dB @ 3.0 GHz
-18.71 dB @ 6.0 GHz
-13.70 dB @ 12.0 GHz
-13.42 dB @ 18.0 GHz

Return Loss Graph



4	COUPLING NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	IG	30/07/2015
		CHK'D	GE	31/07/2015
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				