



2 WAY MM TO BNC MOULDED BLOCK

74-1064-544-B126-3

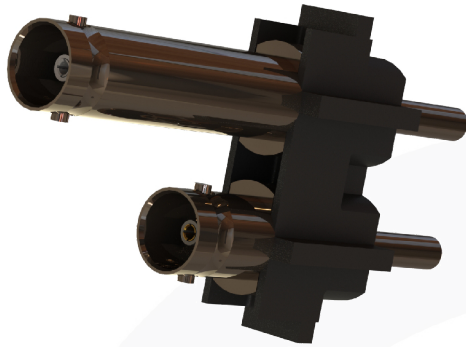

images for illustration purposes only

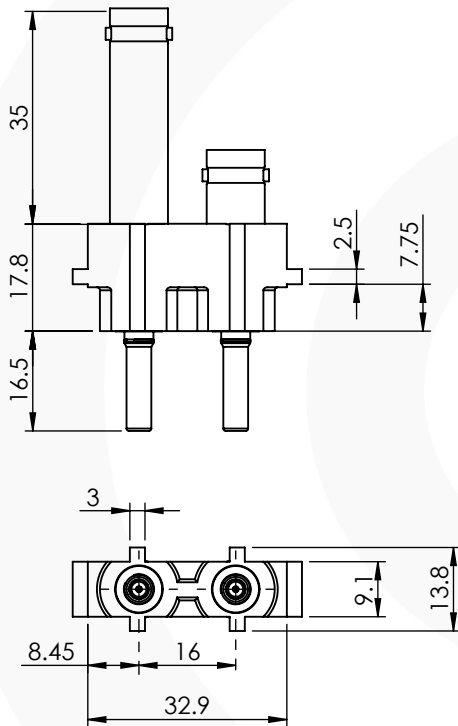

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): N/A

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: N/A

Mating cycles: 5000


Weight: 32.21 g

Connector Interface


image for illustration purposes only

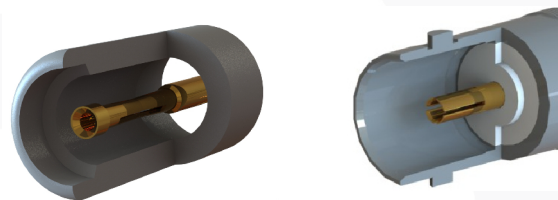

Return Loss Graph (Short Port)

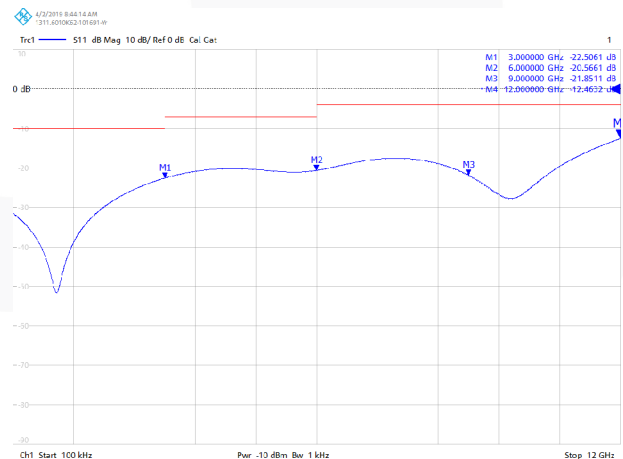

Return Loss Graph (Long Port)

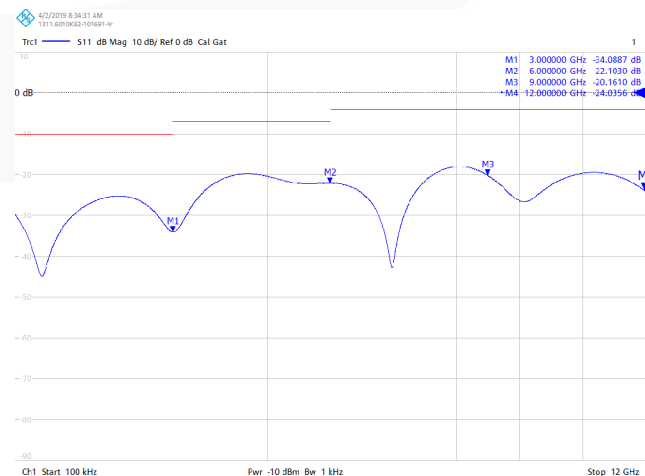

5	BLOCK	POM	N/A
4	C CLIP	STAINLESS STEEL	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	B00	NAME	SIGNATURE	DATE
ISSUE :	3	DRAWN	IG	23/01/2019
		CHK'D	GE	24/01/2019
		APPV'D		
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				