



## MICRO BNC JACK TO BNC JACK STRAIGHT ADAPTOR 74-1067-500

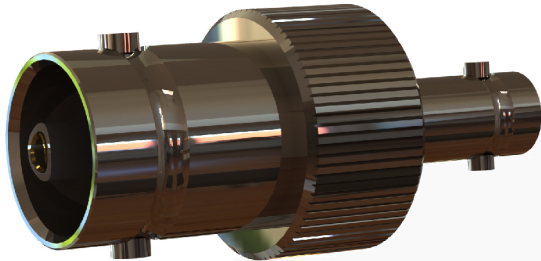

images for illustration purposes only

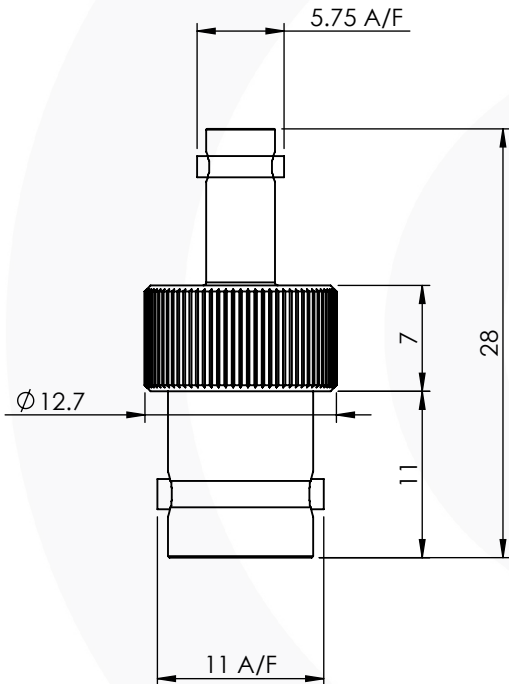

### Environmental Specification

Operating Temp: -55 to +155 Deg C.  
IP Rating (Mated): IP64

### Electrical Specification    Mechanical Specification

Impedance: 75 Ohm                      Contact Retention: 10 N min  
Frequency: 0-18.0 GHz                Cable Retention: N/A  
Dielectric W/V: 1500 Veff              Mating cycles: 500  
Insulation res: 5000 M-Ohm          Weight: 10.13 g

### Connector Interface


image for illustration purposes only



### Performance

- 18.24 dB @ 3.0 GHz
- 14.99 dB @ 6.0 GHz
- 13.36 dB @ 9.0 GHz
- 13.21 dB @ 12.0GHz
- 9.89 dB @ 18.0GHz

### Return Loss Graph

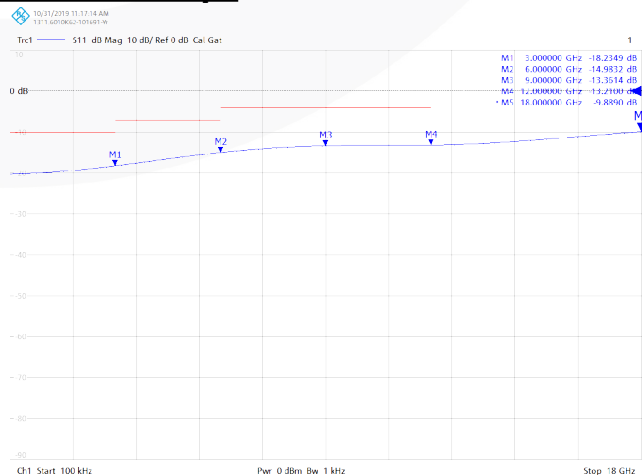

4	INSULATOR	PTFE	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A06	NAME	SIGNATURE	DATE
ISSUE :	2	DRAWN	IG	02/08/2016
		CHK'D	GE	03/08/2016
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				