



MICRO BNC STRAIGHT PLUG TO BNC PLUG ADAPTOR 74-1067-514

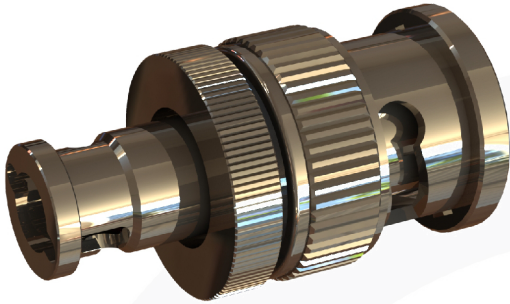

images for illustration purposes only

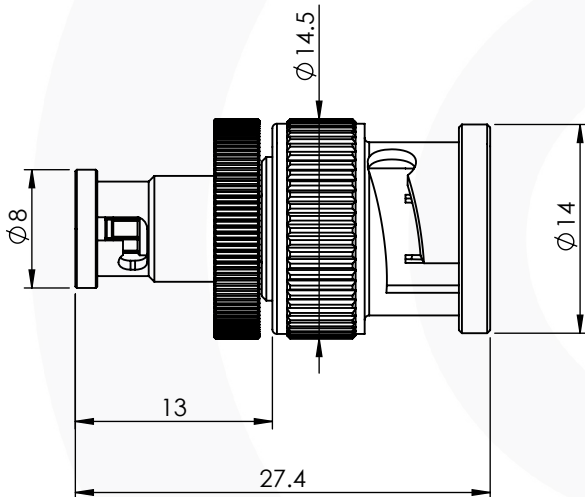

Suitable for Cables:

N/A

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-18 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: N/A

Mating cycles: 500

Weight: 12.59 g

Connector Interface

image for illustration purposes only

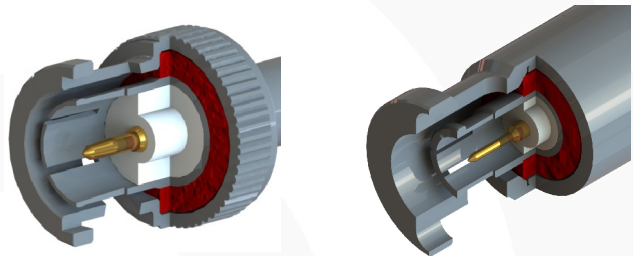

Performance


-27.18 dB @ 3.0 GHz

-23.88 dB @ 6.0 GHz

-18.42 dB @ 12.0 GHz

-21.74 dB @ 18.0 GHz

Return Loss Graph

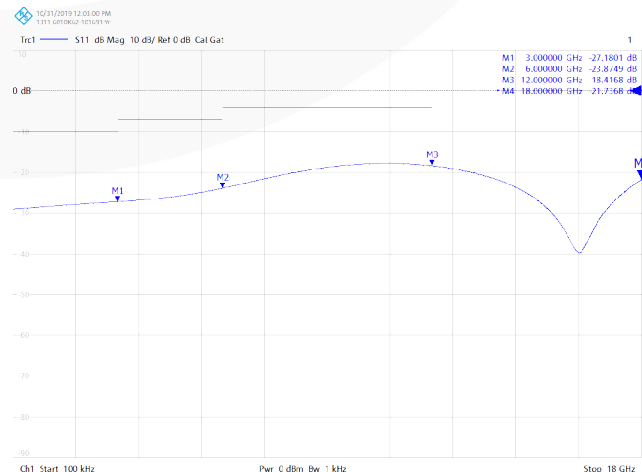

ITEM	DESCRIPTION	MATERIAL	PLATING
8	INNER BODY	BRASS	NICKEL
7	GASKET	SILICONE	N/A
6	BAYONET CAP (BNC)	ZINC	NICKEL
5	INSULATOR	PTFE	N/A
4	WASHERS	SK5	NICKEL
3	SPRING	SK5	NICKEL
2	CENTRE CONTACT	BRASS	GOLD
1	COUPLING NUT	BRASS	NICKEL

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A05	NAME	SIGNATURE	DATE
ISSUE :	3	DRAWN	IG	17/09/2012
		CHK'D	GE	24/09/2012
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				