



## MICRO BNC PLUG TO BNC JACK STRAIGHT ADAPTOR 74-1067-534

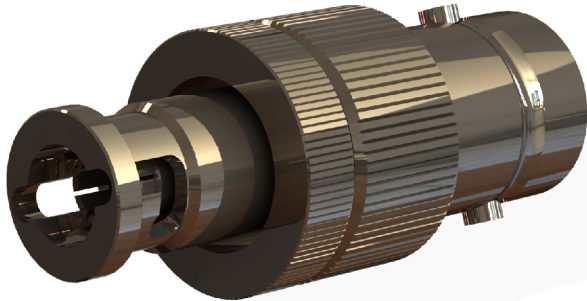

images for illustration purposes only

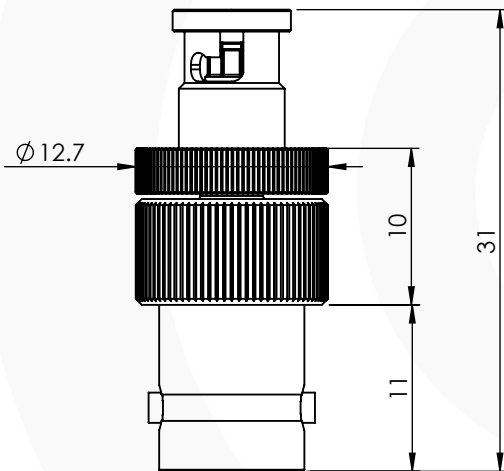

### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

### Electrical Specification    Mechanical Specification

Impedance: 75 Ohm

Contact Retention: 10 N min

Frequency: 0-18 GHz

Cable Retention: N/A

Dielectric W/V: 1500 Veff


Mating cycles: 500

Insulation res: 5000 M-Ohm

Weight: 14.00 g

### Connector Interface

image for illustration purposes only

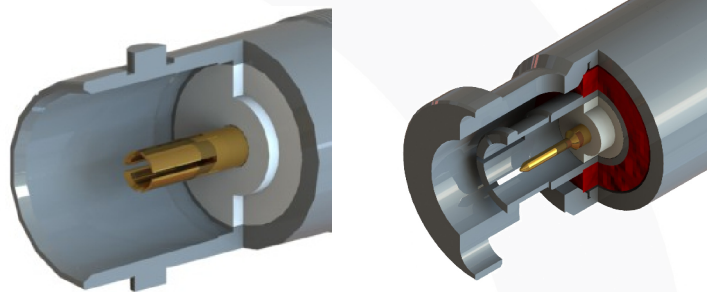

### Performance

- 15.56 dB @ 3.0 GHz
- 17.11 dB @ 6.0 GHz
- 11.45 dB @ 12.0 GHz
- 14.96 dB @ 18.0 GHz

### Return Loss Graph



4	GASKET	SILICONE	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

<b>A4</b>	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A05	NAME	SIGNATURE	DATE
ISSUE :	3	DRAWN	IG	17/09/2012
		CHK'D	GE	24/09/2012
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				