


BNC JACK TO MW ADAPTOR

74-1070-534-D126

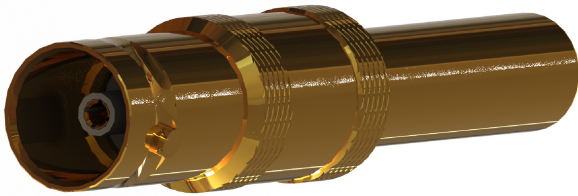

Environmental Specification


Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 44

Electrical Specification Mechanical Specification


Impedance: 75 Ohm	Contact Retention: 22 N min
Frequency: 0-12 GHz	Cable Retention: N/A
Dielectric W/V: 1000 Veff	Mating cycles: 1000
Insulation res: 5000 M-Ohm	Weight: 14.95 g

Connector Interface

image for illustration purposes only

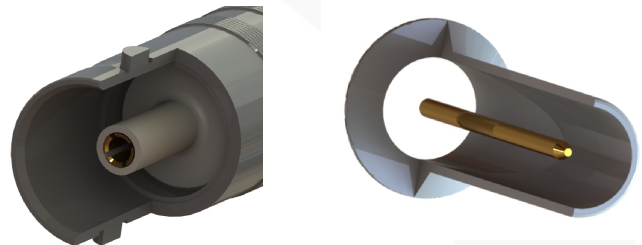

images for illustration purposes only

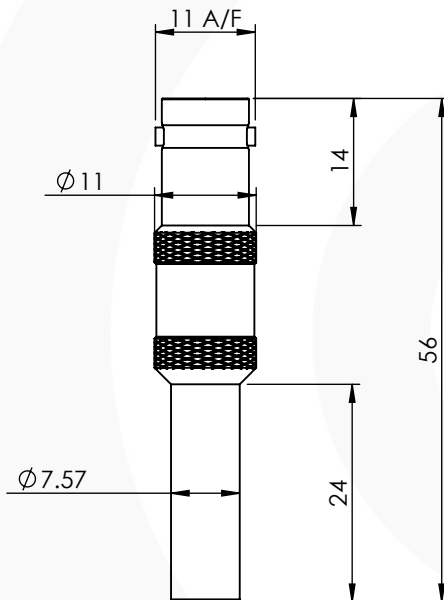

3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	0	DRAWN	IG	02/06/2017
		CHK'D	GE	03/06/2017
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				