

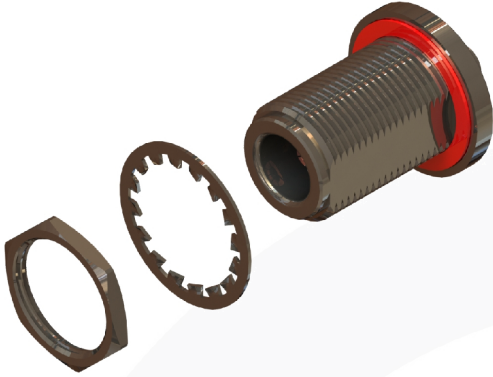


N TYPE B/H JACK TO MCX JACK ADAPTOR


74-2545-501-H3

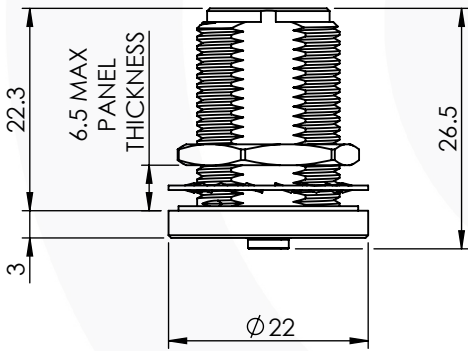

images for illustration purposes only

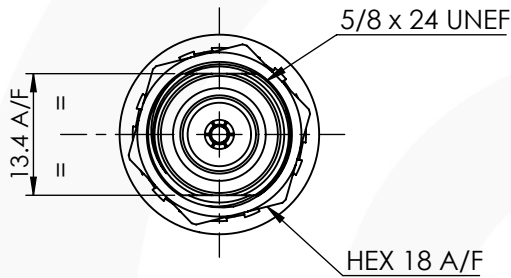

RECOMMENDED MOUNTING:

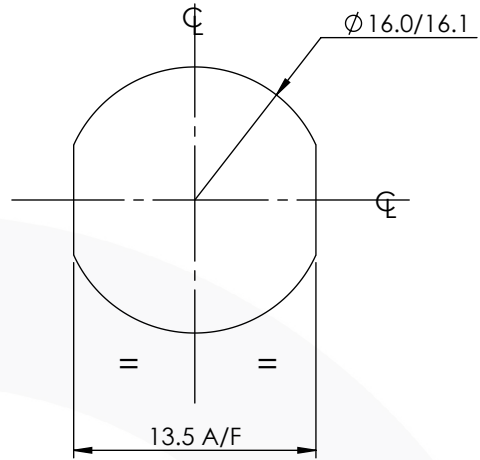

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 68

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-6 GHz

Dielectric W/V: 750 Veff

Insulation res: 1000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 150

Mating cycles: 500

Weight: 33.78 g

Connector Interface

image for illustration purposes only

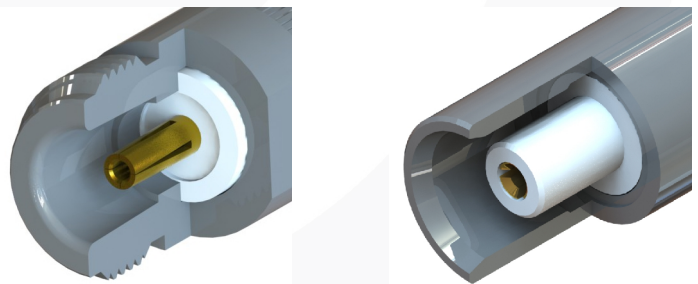

7	LOCK WASHERS	STAINLESS STEEL	PASSIVATED
6	HERMETIC SEAL	EPOXY	N/A
5	GASKET	SILICONE	N/A
4	NUT	STAINLESS STEEL	PASSIVATED
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	STAINLESS STEEL	PASSIVATED
ITEM	DESCRIPTION	MATERIAL	PLATING

A4		SHEET 1 OF 1		
REVISION : A00		DIMENSIONS ARE IN MILLIMETRES		
ISSUE : 1		NAME	SIGNATURE	DATE
DRAWN		G.E.		28-Mar-18
CHK'D		I.G.		28-Mar-18
APPV'D				
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				